

Still a popular choice, Heritage Cast Iron pillars offer unrivalled longevity of service in a massively robust structure. Cast iron street furniture is increasingly being specified in urban areas to preserve architectural character and maintain the coveted listed status that certain sites enjoy.



Seven widths are offered in two different heights.

Size 30 is fitted with a single left-hand opening door whilst the remainder are double door equipped. Customers are able to choose special options from a list (see below) which includes doors fitted back and front and non standard colours.

Specification

Pillar cap and sides cast in close grain grey iron to BS 1452, grade 180

All pillar components receive a zinc phosphate resin treatment followed by a final coat of polyurethane paint in dark Admiralty grey (RAL 7012) or Hollybush green (RAL 6028)

Doors and back panels are fabricated from 4mm nominal thickness special chrome enriched steel

IP3L3 rating

Sets of zinc pre-coated steel in-fill panels available for fitting to root when mounted above ground

Doors can be fitted back and front if required with a centre mounted backboard offering dual entry/security i.e. for REC and Local Authority access

15mm marine ply backboard standard fitment

Two wedge locks with security covers

Removable doors with latching stays

Lucy anti-condensation vented cap

Lifting lugs (for lifting non-equipped cabinets only)



Dimensions (mm)


Pillar size code		30	38	42	46	54	58	66
A	Width of Pillar Roof (RW)	835	1045	1146	1248	1452	1553	1756
B	Ground Fixing Centres (Bolt on root only)	476	686	787	889	1092	1194	1397
C	Ground Fixing Centres (Shell only)	724	934	1035	1137	1340	1442	1645
D	Min. distances required to open door	486	452	503	554	655	706	808
E	Internal Width	762	972	1073	1175	1378	1480	1683
	Backboard Width	686	896	997	1099	1302	1404	1607

Approx. Empty Weight (Kg)		30	38	42	46	54	58	66
Highline		280	315	332	360	398	415	440
Lowline		241	279	292	318	343	368	394

Note

1. Highline & Lowline dimensions A to D are common.
2. Pillar 30 single door hinged from left hand side.
3. Internal working depth (WD) from backboard = 353mm. (461mm external depth)
4. Backboard height: Highline = 1185mm Lowline = 880mm.

The ordering code consists of 3 sections

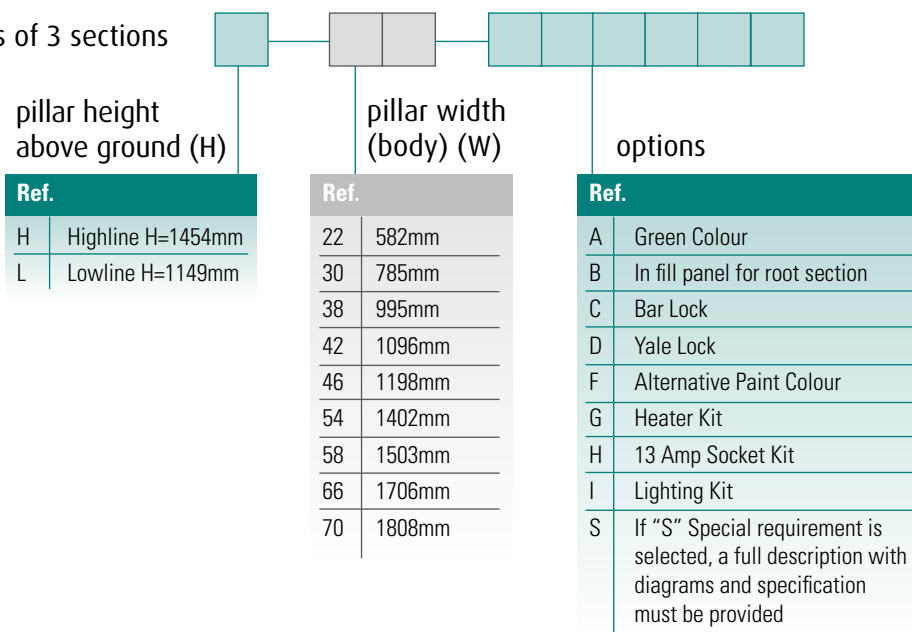

Options

- In-fill/apron plate
- Yale lock or bar lock
- Alternative paint finishes to British Standards
- Interior light, heater with thermostat
- Pre-equipped backboard according to Customer specification with factory test certificate
- G2A Highways Agency paint specification

