

- An in ground retractable unit which offers a variety of Single Phase Neutral (SPN) and Three Phase Neutral (TPN) socket
 - arrangements.
- Flush top surface when not in use.
- Ideal power distribution method for shopping centres, airports, markets, events – anywhere that on demand power/utilities are required.
- Two standard Westminster sizes.
- Suitable for single or three phase DNO

Features

- 16A / 32A socket arrangements available
- 110/240/400V A.C. variants
- Optional automatic power disconnection when unit is folded away
- Fully operational in 6o seconds
- Individual socket RCBO protection
- Positive drainage to suit 100mm pipe
- Electrical components sealed to IP67
- 50mm deep recess in covers can be finished with floor infill that matches surroundings
- Assisted lift on lids for ease of use
- Cable entry plates for cable glands
- Stainless steel anti-vermin construction
- All components fully earth bonded



Options

- Stainless steel construction
- Data points can be incorporated
- Water connection
- Stainless steel tread plate option
- Smart metering
- Safety tilt switch disconnects power to sockets when folded away.



Thorne & Derrick
RRICK +44 (0) 191 410 4292

NATIONAL www.powerandcables.com



Construction

- Constructed from 5mm and 10mm galvanised steel
- Long life stainless steel wedge lock and hinges
- Hinged stainless steel lock cover
- Bolted construction for easy panel replacement in case of damage
- IP67 Socket box

Weights

- 4 way Westminster approximately 150Kg
- 5 way Westminster approximately 18oKg

Part Numbers


- 4 way Westminster EA10202299
- 5 way Westminster EA10202300

Conformity to standards

- Hot dipped galvanised to BS EN ISO 1461
- IP67 accordance to IEC60529
- Designed and manufactured in accordance with quality management system ISO9001:2008

Dimensions

	Outgoing ways	
	2-4	5
Length (L)	905	1035
Width	518	518
Tub height	475	475
Raised height (H)	590	720
Raised width (W)	275	275

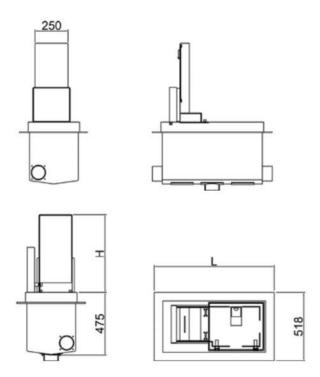

Availability – 2-3 weeks for standard products

