## HYDRAULIC CUTTING TOOL

## general features

	Max cutting Ø mm	Dimensi	Weight kg	
		length	width	kg
	45	550	144	5,8

		STORAGE	Ī	
Туре	Dimensions mm	Weight kg	Supplied with the tool	Purchase separately
VAL P7	727x202xh115	1,3	*	_

Hand operated hydraulic tool specifically designed to cut Copper, aldrey, Aluminium, Aluminium-Steel cables and Steel ropes, Aluminium and Steel rods having a max overall diameter of 45 mm.

**OVERHEAD LINE APPLICATION** 


New model, even more self contained, robust and sturdy.

The blades are manufactured from high strength special Steel, heat treated to ensure a long service life. The head can rotate through 180 degrees, to enable the operator to work in the most comfortable position, and can easily be opened to allow cutting of running cables.

HT-TCO41N features an automatic safety valve to bypass oil when

**OVERHEAD LINE APPLICATION** 

reaching maximum pressure; a pressure release device can also be operated at any stage of operation.

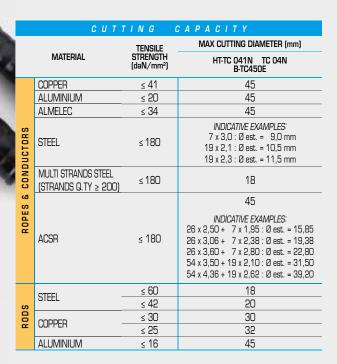

## **HYDRAULIC CUTTING HEAD**

general features



	Max cutting Ø	Max operating pressure	Dimensions mm		Weight
	mm	bar	length	width	kg
6 Car	45	700	311	100	4,0
B					
0			STORAGE		
C B	Туре	Dimensions mm	Weight kg	Supplied with the tool	Purchase separately

VAL 04

Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max, (see page 170-174)

TCO4N has the same cutting capability as HT-TCO41N.

