

BS6622/BS7835 Single Core Armoured 15kV XLPE Stranded Copper Conductor

CABLE CHARACTERISTICS



Bending radius $r=15D$

CABLE DESCRIPTION

1.CONDUCTOR

Compact circular stranded copper conductor complying with BS EN 60228 Class 2.

CONDUCTOR SCREEN

Extruded semi-conducting compound bonded to the insulation and applied in the same operation as the insulation.

2.INSULATION

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature of 90°C.

3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as standard but fully bonded screens may be provided if specified.

4.METALLIC SCREEN

Copper tapes applied overlapped to provide an earth fault current path.

5.BEDDING


Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

6.ARMOURING

Single layer of circular aluminium wires.

7.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified e.g. medium density polyethylene (MDPE).

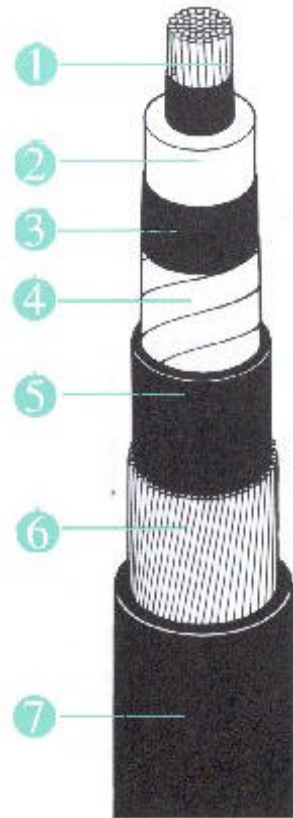

THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

BS6622/BS7835 Single Core Armoured 15kV XLPE Stranded Copper Conductor

Constructional Data

Cross-sectional area mm ²	Minimum average thickness of insulation mm	Nominal thickness of PVC/LSOH bedding mm	Nominal number and diameter of armoured wires no/mm	Nominal thickness of PVC/LSOH oversheath mm	Approx. overall diameter of cable mm
70	4.5	1.2	1.6	1.9	31.5
95	4.5	1.2	2.0	2.0	34.0
120	4.5	1.2	2.0	2.1	35.5
150	4.5	1.2	2.0	2.1	37.0
185	4.5	1.2	2.0	2.2	39.0
240	4.5	1.2	2.0	2.3	41.0
300	4.5	1.2	2.0	2.3	43.5
400	4.5	1.3	2.5	2.5	48.5
500	4.5	1.3	2.5	2.6	52.0
630	4.5	1.4	2.5	2.7	56.0
800	4.5	1.5	2.5	2.8	61.0
1000	4.5	1.6	2.5	3.0	67.0

Installation Data

Cross-sectional area mm ²	Approximate cable weight kg/m	Nominal drum length m	Nominal internal diameter of twin ducts mm
70	1.6	1000	100
95	1.9	500	100
120	2.3	500	100
150	2.6	500	100
185	3.0	500	100
240	3.6	500	100
300	4.2	500	100
400	5.3	300	100
500	6.5	300	100
630	8.0	300	100
800	10.0	300	100
1000	12.4	300	125

BS6622/BS7835 Single Core Armoured 15kV XLPE Stranded Copper Conductor

Electrical Data

Cross-sectional area mm ²	Maximum DC resistance of conductor at 20°C μOhms/m	Maximum AC resistance of conductor at 90°C μOhms/m
70	268	342
95	193	247
120	153	196
150	124	159
185	99.1	127
240	75.4	98
300	60.1	79
400	47.0	63
500	36.6	51
630	28.3	41
800	22.1	34
1000	17.6	30

Ratings Data

Cross-sectional area mm ²	Current Ratings			Short Circuit Ratings	
	Laid in ground Amps	Drawn into twin wall ducts Amps	Laid in air Amps	One second short circuit ratings of conductor kA	One second short circuit rating of armour kA
70	265	250	305	10.0	7.5
95	315	290	375	13.5	10.1
120	360	320	430	17.1	10.9
150	400	355	485	21.4	11.4
185	450	390	550	26.4	12.0
240	510	435	640	34.3	12.8
300	570	470	725	42.9	13.6
400	625	505	820	57.2	18.7
500	690	550	925	71.5	20.4
630	750	590	1035	90.1	22.5
800	810	630	1140	114.4	24.5
1000	855	655	1230	143.0	27.0

Current Rating Conditions:

Ground Temperature	15°C
Ambient temperature (air)	25°C
Depth of Burial	0.8m
Thermal Resistance of Soil	1.2°C m/W

Single core cables in trefoil, bonded and earthed at both ends.



**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com