

BS6622/BS7835 Single Core Armoured 22kV XLPE Stranded Copper Conductor

CABLE CHARACTERISTICS



Bending radius $r=15D$

CABLE DESCRIPTION

1.CONDUCTOR

Compact circular stranded copper conductor complying with BS EN 60228 Class 2.

CONDUCTOR SCREEN

Extruded semi-conducting compound bonded to the insulation and applied in the same operation as the insulation.

2.INSULATION

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature of 90°C.

3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as standard but fully bonded screens may be provided if specified.

4.METALLIC SCREEN

Copper tapes applied overlapped to provide an earth fault current path.

5.BEDDING SHEATH


Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

6.ARMOURING

Single layer of circular aluminium wires.

7.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified e.g. medium density polyethylene (MDPE).

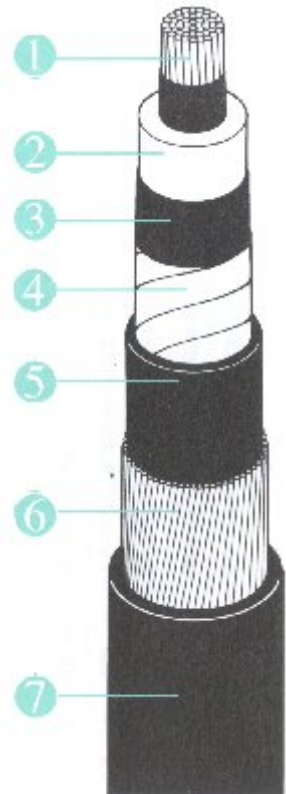

THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

BS6622/BS7835 Single Core Armoured 22kV XLPE Stranded Copper Conductor

Constructional Data

Cross-sectional area mm ²	Minimum average thickness of insulation mm	Nominal thickness of PVC/LSOH bedding mm	Nominal number and diameter of armoured wires no/mm	Nominal thickness of PVC/LSOH oversheath mm	Approx. overall diameter of cable mm
70	5.5	1.2	2.0	2	34.5
95	5.5	1.2	2.0	2.1	36.0
120	5.5	1.2	2.0	2.1	37.5
150	5.5	1.2	2.0	2.2	39.5
185	5.5	1.2	2.0	2.2	41.0
240	5.5	1.2	2.0	2.3	43.5
300	5.5	1.3	2.5	2.4	47.0
400	5.5	1.3	2.5	2.5	50.5
500	5.5	1.4	2.5	2.6	54.0
630	5.5	1.4	2.5	2.8	58.5
800	5.5	1.5	2.5	2.9	63.0
1000	5.5	1.6	2.5	3.0	69.0

Installation Data

Cross-sectional area mm ²	Approximate cable weight kg/m	Nominal drum length m	Nominal internal diameter of twin wall ducts mm
70	1.8	500	100
95	2.1	500	100
120	2.4	500	100
150	2.8	500	100
185	3.2	500	100
240	3.8	500	100
300	4.6	500	100
400	5.6	250	100
500	6.8	250	100
630	8.3	250	100
800	10.3	250	100
1000	12.7	250	125

BS6622/BS7835 Single Core Armoured 22kV XLPE Stranded Copper Conductor

Electrical Data

Cross-sectional area mm ²	Maximum DC resistance of conductor at 20°C μOhms/m	Maximum AC resistance of conductor at 90°C μOhms/m
70	268	342
95	193	247
120	153	196
150	124	159
185	99.1	128
240	75.4	98
300	60.1	79
400	47	63
500	36.6	51
630	28.3	41
800	22.1	34
1000	17.6	29

Ratings Data

Cross-sectional area mm ²	Current Ratings			One second short circuit rating of conductor kA	One second short circuit rating of armour kA
	Laid in ground Amps	Drawn into twin wall ducts Amps	Laid in air Amps		
70	265	245	310	10.0	10.4
95	315	290	375	13.6	10.9
120	360	320	430	17.2	11.7
150	400	355	485	21.5	12.0
185	445	390	555	26.5	12.8
240	510	435	640	34.3	13.6
300	560	465	725	42.9	18.3
400	625	505	825	57.2	20.0
500	690	550	930	71.5	21.7
630	750	595	1035	90.1	23.3
800	810	635	1140	114.5	25.4
1000	855	660	1235	143.1	27.9

Current Rating Conditions:

Ground Temperature	15°C
Ambient temperature (air)	25°C
Depth of burial	0.8m
Thermal resistance of soil	1.2°Cm/W

Single core cables in trefoil, bonded and earthed at both ends.



**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com