

BS6622/BS7835 Single Core Armoured 6.6kV XLPE Stranded Copper Conductor

CABLE CHARACTERISTICS



Bending radius $r=15D$

CABLE DESCRIPTION

1.CONDUCTOR

Compact circular stranded copper conductor complying with BS EN 60228 Class 2.

CONDUCTOR SCREEN

Extruded semi-conducting compound bonded to the insulation and applied in the same operation as the insulation.

2.INSULATION

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature of 90°C.

3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as standard but fully bonded screens may be provided if specified.

4.METALLIC SCREEN

Copper tapes applied overlapped to provide an earth fault current path.

5.BEDDING


Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

6.ARMOURING

Single layer of circular aluminium wires.

7.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified e.g. medium density polyethylene (MDPE).

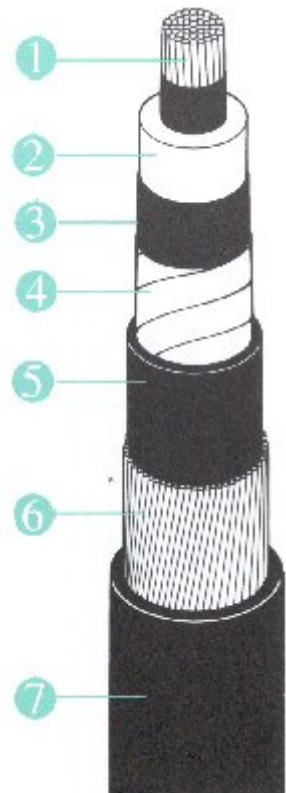

THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

BS6622/BS7835 Single Core Armoured * ** kV XLPE Stranded Copper Conductor

Constructional Data

Cross-sectional area mm ²	Minimum average thickness of insulation mm	Nominal thickness of PVC/LSOH bedding mm	Nominal number and diameter of armoured wires no/mm	Nominal thickness of PVC/LSOH oversheath mm	Approx. overall diameter of cable mm
70	2.5	1.2	1.6	1.8	27.0
95	2.5	1.2	1.6	1.9	29.0
120	2.5	1.2	1.6	1.9	30.5
150	2.5	1.2	1.6	2.0	32.0
185	2.5	1.2	2.0	2.0	34.5
240	2.6	1.2	2.0	2.1	37.0
300	2.8	1.2	2.0	2.2	40.0
400	3.0	1.2	2.0	2.3	44.0
500	3.2	1.3	2.5	2.5	49.0
630	3.2	1.4	2.5	2.6	53.5

Installation Data

Cross-sectional area mm ²	Approximate cable weight kg/m	Nominal drum length m	Nominal internal diameter of twin wall ducts mm
70	1.3	1000	100
95	1.6	1000	100
120	1.9	1000	100
150	2.2	500	100
185	2.7	500	100
240	3.3	500	100
300	4.0	500	100
400	4.9	500	100
500	6.3	300	100
630	7.8	300	100

BS6622/BS7835 Single Core Armoured * ** kV XLPE Stranded Copper Conductor

Electrical Data

Cross-sectional area mm ²	Maximum DC resistance of conductor at 20°C μOhms/m	Maximum AC resistance of conductor at 90°C μOhms/m
70	268	342
95	193	247
120	153	196
150	124	159
185	99.1	128
240	75.4	98
300	60.1	79
400	47	63
500	36.6	51
630	28.3	41

Ratings Data

Cross-sectional area mm ²	Current Ratings			Short Circuit Ratings	
	Laid in ground	Drawn into twin wall ducts	Laid in air	One second short circuit rating of conductor kA	One second short circuit rating of armour kA
	Amps	Amps	Amps		
70	265	250	300	10.0	6.3
95	315	295	365	13.6	6.8
120	360	325	420	17.2	7.3
150	400	360	480	21.5	7.6
185	450	390	545	26.5	10.4
240	515	430	635	34.3	11.2
300	570	470	725	42.9	12.2
400	635	515	830	57.2	13.6
500	690	545	925	71.5	19.1
630	755	585	1035	90.1	21.2

Current Rating Conditions:

Ground Temperature	15°C
Ambient temperature (air)	25°C
Depth of Burial	0.8m
Thermal Resistance of Soil	1.2 °C m/W

Single core cables in trefoil, bonded and earthed at both ends.



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com