

**E1FX/MF**

Ex e Ex d

E1FX/MF Mining, Internationally Approved, Flanged Explosive Atmosphere Cable Gland


For Pliable Wire Armoured cables

- High quality durable materials
- Wide sealing range for each cable gland size
- Fully sequential, three step installation procedure
- Reduces subjectivity of installations
- Complete with flanged adaptor
- Metal-to-metal armour clamping
- Direct & remote installation
- Displacement type flameproof inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- -60°C to +130°C
- Permitted in Zone 1
- Internationally marked, IECEx & ATEX
- EMC tested



See MA/FT, MA/B page for flange mounting dimensions

Alternative flange sizes available upon request

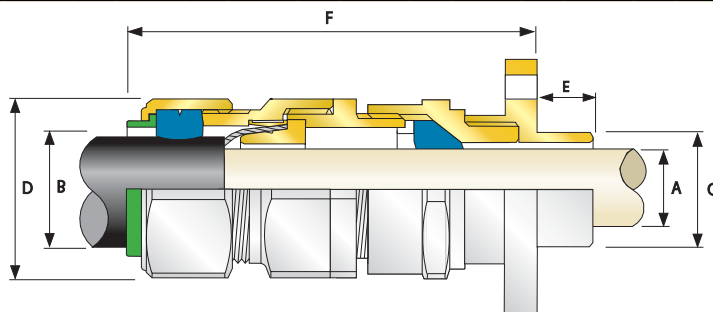

TECHNICAL DATA	
Design Specification	BS 6121:Part 1:1989, IEC 62444, EN 62444
Mechanical Classifications*	Impact = Level 8, Retention = Class D
Enclosure Protection	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
Electrical Classifications*	Category B
ATEX Certificate	SIRA13ATEX1071X, SIRA09ATEX1034U
Code of Protection	⊕ IM2 Ex d I Mb, Ex e I Mb
Compliance Standards	EN 60079-0,1,7
IECEx Certificate	IECEx SIR 13.0026X, IECEx SIR 09.0024U, IECEx SIM 14.0007X
Code of Protection	Ex d I Mb, Ex e I Mb
Compliance Standards	IEC 60079-0,1,7
Ingress Protection Rating	IP66**
Cable Gland Material	Brass, Electroless Nickel Plated Brass
Seal Material	CMP SOLO LSF Halogen Free Thermoset Elastomer
Cable Type	Pliable Armour Wire (PWA)
Armour Clamping	Detachable Armour Cone & AnyWay Universal Clamping Ring
Sealing Technique	CMP Inner Displacement Seal & Unique CMP 'LRS'™ Outer Load Retention Seal
Sealing Area(s)	Cable Inner Bedding & Outer Cable Sheath

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444

** Refer to page 7 or www.cmp-products.com for further information on Ingress Protection Ratings

Cable Gland Selection Table

Refer to illustration at the top of the page.

Cable Gland Size	Minimum Spigot Length "E"	Spigot Diameter "C"	Cable Bedding Diameter "A"		Overall Cable Diameter "B"		Pliable Wire Diameter		Across Flats "D"	Across Corners "D"	Protrusion Length "F"	Combined Ordering Reference (*Brass Metric)			Cable Gland Weight (Kgs)
			Min	Max	Min	Max	Min	Max				Size	Type	Ordering Suffix	
20S	15.0	19.0	6.1	11.6	9.5	15.9	0.0	7/0.45	24.0	26.4	89.5	20S	E1FX	1RA/MF	0.302
20	15.0	19.0	6.5	13.9	12.5	20.9	0.0	7/0.45	30.5	33.6	92.5	20	E1FX	1RA/MF	0.361
25S	15.0	25.4	11.1	19.9	14.0	22.0	0.0	7/0.45	37.5	41.3	109.6	25S	E1FX	1RA/MF	0.575
25	15.0	25.4	11.1	19.9	18.2	26.2	0.0	7/0.45	37.5	41.3	109.6	25	E1FX	1RA/MF	0.572
32	15.0	31.8	17.0	26.2	23.7	33.9	0.0	7/0.45	46.0	50.6	107.2	32	E1FX	1RA/MF	0.745
40	15.0	38.1	22.0	32.1	27.9	40.4	0.0	7/0.71	55.0	60.5	111.2	40	E1FX	1RA/MF	1.015
50S	15.0	50.8	29.5	38.1	35.2	46.7	0.0	7/0.71	60.0	66.0	109.0	50S	E1FX	1RA/MF	1.478
50	15.0	50.8	35.6	44.0	40.4	53.0	0.0	7/0.71	70.1	77.1	113.0	50	E1FX	1RA/MF	1.683
63S	15.0	63.5	40.1	49.9	45.6	59.4	0.0	7/0.71	75.0	82.5	120.5	63S	E1FX	1RA/MF	2.109
63	15.0	63.5	47.2	55.9	54.6	65.8	0.0	7/0.71	80.0	88.0	122.5	63	E1FX	1RA/MF	2.149
75S	15.0	76.2	52.8	61.9	59.0	72.0	0.0	7/0.71	90.0	99.0	142.5	75S	E1FX	1RA/MF	3.664
75	15.0	76.2	59.1	67.9	66.7	78.4	0.0	7/0.71	100.0	110.0	144.5	75	E1FX	1RA/MF	3.978

*Note : For material options please add the following suffix to change the Ordering Reference ; Brass (no suffix required), Nickel Plated Brass "5", 316 Grade Stainless Steel "4", Copper Free Aluminium "1"

Examples: 32E1FXMF1RA = Brass, 50SE1FXMF1RA5 = Nickel Plated Brass, 25E1FXMF1RA4 = Stainless Steel

Dimensions are displayed in millimetres unless otherwise stated



THORNE & DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

TDS572 REV 6