




E2W

E2W Double Seal Industrial Cable Gland

For Lead Sheathed Steel & Aluminium Wire Armoured Cables

- Effectively earths / grounds lead sheathed cables
- Metal-to-metal armour clamping
- Direct & remote installation
- Permanently crimped, low impedance earth termination
- Secure against self-loosening
- Displacement type inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- Designed to prevent Coldflow
- Deluge protection option
- 60°C to +130°C
- EMC tested

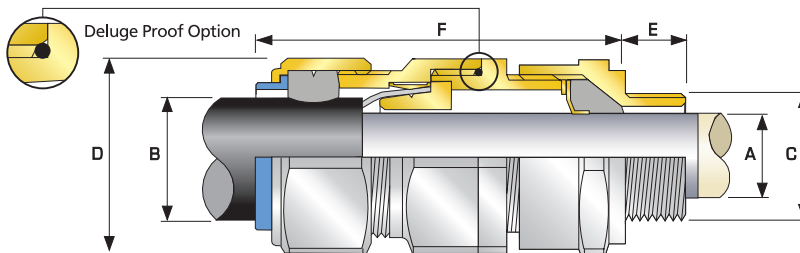

TECHNICAL DATA

Design Specification	BS 6121:Part 1:1989, IEC 62444, EN 62444
Mechanical Classifications*	Impact = Level 8, Retention = Class D
Enclosure Protection	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
Electrical Classifications*	Category B
GOST R Certificate No.	POCC GB.ГБ05.H00187
GOST K Certificate No.	KZ 7500361.01.01.25266
RoK Permit For Use Number	19-02-UL-1957
Marine Approvals	LRS: 01/00171 (E1), ABS: 01-LD234401A/3-PDA
Ingress Protection Rating	IP66 as standard (IP67, IP68 available upon request)**
Cable Gland Material	Brass, Electroless Nickel Plated Brass, Aluminium,
Seal Material	CMP Thermoset Rubber
Cable Type	Lead Sheathed & Single Wire Armour (LC/SWA), Lead Sheathed & Aluminium Wire Armour (LC/AWA)
Armour Clamping	Detachable Armour Cone & AnyWay Universal Clamping Ring
Sealing Technique	CMP Inner Displacement Seal & Unique CMP 'LRS'™ Outer Load Retention Seal
Sealing Area(s)	Cable Inner Bedding & Outer Cable Sheath

Note : * Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444

Note : ** Refer to page 7 or www.cmp-products.com for further information on Ingress Protection Ratings

Cable Gland Selection Table

Refer to illustration at the top of the page

Cable Gland Size	Available Entry Threads "C" (Alternate Metric Thread Lengths Available)					Cable Lead Sheath Diameter "A"		Overall Cable Diameter "B"		Armour Range		Across Flats "D"	Across Corners "D"	Protrusion Length "F"	Combined Ordering Reference (*Brass Metric)			Shroud	Cable Gland Weight (Kgs)
	Standard			Option	Size										Type	Ordering Suffix			
	Metric	Thread Length (Metric) "E"	NPT	Thread Length (NPT) "E"		NPT	Min	Max	Min	Max	Min	Max	Max				Max		
20s16	M20	10.0	1/2"	19.9	3/4"	3.1	7.8	6.1	13.1	0.8	1.25	24.0	26.4	72.5	20S16	E2W	1RA	PVC04	0.160
20S	M20	10.0	1/2"	19.9	3/4"	6.1	11.0	9.5	15.9	0.8	1.25	24.0	26.4	70.0	20S	E2W	1RA	PVC04	0.150
20	M20	10.0	3/4"	19.9	3/4"	6.5	13.4	12.5	20.9	0.8	1.25	30.5	33.6	73.0	20	E2W	1RA	PVC06	0.210
25S	M25	10.0	1/2"	20.2	1"	11.1	19.3	14.0	22.0	1.25	1.6	37.5	41.3	89.0	25S	E2W	1RA	PVC09	0.330
25	M25	10.0	3/4"	20.2	1"	11.1	19.3	18.2	26.2	1.25	1.6	37.5	41.3	89.0	25	E2W	1RA	PVC09	0.330
32	M32	10.0	1"	25.0	1 1/4"	17.0	25.5	23.7	33.9	1.6	2.0	46.0	50.6	86.0	32	E2W	1RA	PVC11	0.430
40	M40	15.0	1 1/4"	25.6	1 1/2"	22.0	31.2	27.9	40.4	1.6	2.0	55.0	60.5	90.0	40	E2W	1RA	PVC15	0.620
50S	M50	15.0	1 1/2"	26.1	2"	29.5	37.2	35.2	46.7	2.0	2.5	60.0	66.0	91.0	50S	E2W	1RA	PVC18	0.750
50	M50	15.0	2"	26.9	2 1/2"	35.6	42.6	40.4	53.0	2.0	2.5	70.1	77.1	95.0	50	E2W	1RA	PVC21	0.950
63S	M63	15.0	2"	26.9	2 1/2"	40.1	48.5	45.6	59.4	2.0	2.5	75.0	82.5	102.0	63S	E2W	1RA	PVC23	1.340
63	M63	15.0	2 1/2"	39.9	3"	47.2	54.2	54.6	65.8	2.0	2.5	80.0	88.0	104.0	63	E2W	1RA	PVC25	1.340
75S	M75	15.0	2 1/2"	39.9	3"	52.8	60.2	59.0	72.0	2.0	2.5	90.0	99.0	115.0	75S	E2W	1RA	PVC28	2.110
75	M75	15.0	3"	41.5	3 1/2"	59.1	65.2	66.7	78.4	2.5	3.0	100.0	110.0	117.0	75	E2W	1RA	PVC30	2.420
90	M90	24.0	3 1/2"	42.8	4"	66.6	77.1	76.2	90.3	3.15	4.0	114.3	125.4	147.0	90	E2W	1RA	PVC32	4.210
100	M100	24.0	4"	44.0	5"	76.0	88.1	86.1	101.4	3.15	4.0	123.0	135.3	140.0	100	E2W	1RA	LSF33	4.450
115	M115	24.0	4"	44.0	5"	86.0	94.1	101.5	110.2	3.15	4.0	133.4	146.7	162.0	115	E2W	1RA	LSF34	6.190
130	M130	24.0	5"	46.8	6"	97.0	110.1	110.2	123.2	3.15	4.0	152.4	160.6	174.0	130	E2W	1RA	LSF35	8.340

*Note : For material options please add the following suffix to change the Ordering Reference : Brass (no suffix required), Nickel Plated Brass "5", Copper Free Aluminium "1"
For NPT options add the following digits to the material suffix; 1/2" = 31; 3/4" = 32; 1" = 33; 1 1/4" = 34; 1 1/2" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32E2W1RA534 = Nickel Plated Brass 1-1/4" NPT, 50SE2W1RA035 = Brass 1-1/2" NPT, 25E2W1RA432 = Stainless Steel 3/4" NPT, 20E2W1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated



**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

TDS535 ISSUE7 08/15