


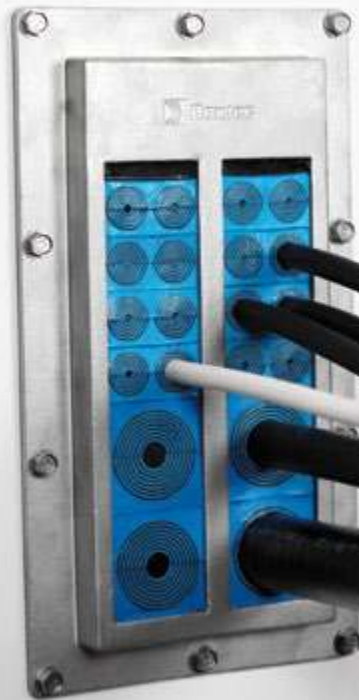

## Roxtec ComSeal™ 10, 16 and 32

– CABINET SEALS FOR QUICK INSTALLATION

### Complete sealing solution

The Roxtec ComSeal™ is an innovative cable entry solution for cables in cabinets. The frames are available in two different materials – light-weight aluminum and acid proof stainless steel, AISI 316 for corrosive environment.

### Supplied as complete kits

The solutions are supplied as ready-made kits, including adaptable

sealing modules, which simplifies planning, purchasing and installation.


### Quick installation

The seals can be attached either to the inside or the outside of a cabinet. This compensates for interfering equipment in cramped spaces and makes installation easy.

### BENEFITS


- Available in powder coated aluminum or acid proof stainless steel, AISI 316
- Approved for IP 55
- Multidiameter™ by Roxtec – adaptability through modules with removable layers
- UL Certified 3, 12, 12K

# Roxtec ComSeal™ 10

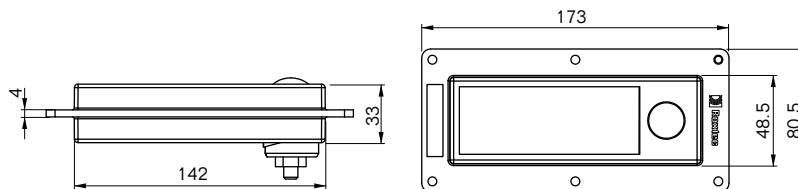

## Aluminum



| Kit                   | Multidiameter™ range and number of cables/pipes |                                              | Weight<br>(kg) (lb) |      | Holecut width x length (mm) | Art No.       |
|-----------------------|-------------------------------------------------|----------------------------------------------|---------------------|------|-----------------------------|---------------|
|                       | 0+3.5-16.5<br>0+0.138-0.650<br>(CM 20w40)       | 0+9.5-32.5<br>0+0.374-1.280<br>(CM 40 10-32) |                     |      |                             |               |
| <b>ComSeal™ 10/4</b>  | 2 cables/pipes                                  | 2 cables/pipes                               | 0.515               | 1.13 | 56 x149                     | <b>105299</b> |
| <b>ComSeal™ 10/7</b>  | 6 cables/pipes                                  | 1 cables/pipes                               | 0.515               | 1.13 | 56 x149                     | <b>105301</b> |
| <b>ComSeal™ 10/10</b> | 10 cables/pipes                                 |                                              | 0.515               | 1.13 | 56 x149                     | <b>105302</b> |

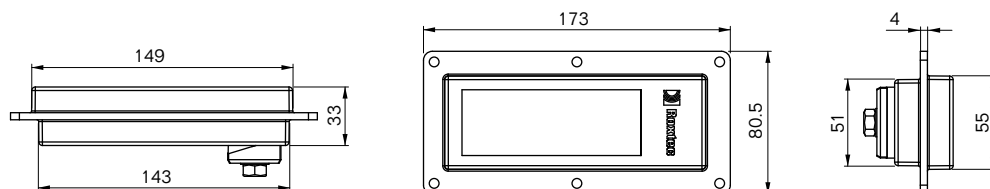

## Acid proof stainless steel




| Kit                            | Multidiameter™ range and number of cables/pipes |                                              | Weight<br>(kg) (lb) |      | Holecut width x length (mm) | Art No.       |
|--------------------------------|-------------------------------------------------|----------------------------------------------|---------------------|------|-----------------------------|---------------|
|                                | 0+3.5-16.5<br>0+0.138-0.650<br>(CM 20w40)       | 0+9.5-32.5<br>0+0.374-1.280<br>(CM 40 10-32) |                     |      |                             |               |
| <b>ComSeal™ 10/4 AISI 316</b>  | 2 cables/pipes                                  | 2 cables/pipes                               | 1.096               | 2.42 | 58.5 x151                   | <b>105676</b> |
| <b>ComSeal™ 10/7 AISI 316</b>  | 6 cables/pipes                                  | 1 cables/pipes                               | 1.096               | 2.42 | 58.5 x151                   | <b>105677</b> |
| <b>ComSeal™ 10/10 AISI 316</b> | 10 cables/pipes                                 |                                              | 1.096               | 2.42 | 58.5 x151                   | <b>105678</b> |

# Roxtec ComSeal™ 16

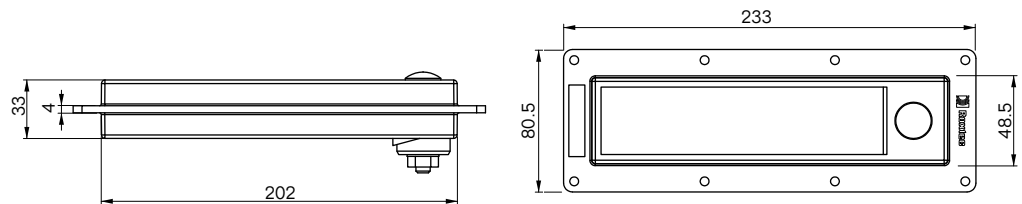

## Aluminum




| Kit                   | Multidiameter™ range and number of cables/pipes |                                              | Weight |      | Holecut width x lenght (mm) | Art No.       |
|-----------------------|-------------------------------------------------|----------------------------------------------|--------|------|-----------------------------|---------------|
|                       | 0+3.5-16.5<br>0+0.138-0.650<br>(CM 20w40)       | 0+9.5-32.5<br>0+0.374-1.280<br>(CM 40 10-32) | (kg)   | (lb) |                             |               |
| <b>ComSeal™ 16/4</b>  |                                                 | 4 cables/pipes                               | 0.666  | 1.47 | 56 x 209                    | <b>105310</b> |
| <b>ComSeal™ 16/7</b>  | 4 cables/pipes                                  | 3 cables/pipes                               | 0.666  | 1.47 | 56 x 209                    | <b>105312</b> |
| <b>ComSeal™ 16/10</b> | 8 cables/pipes                                  | 2 cables/pipes                               | 0.666  | 1.47 | 56 x 209                    | <b>105313</b> |
| <b>ComSeal™ 16/16</b> | 16 cables/pipes                                 |                                              | 0.666  | 1.47 | 56 x 209                    | <b>105314</b> |

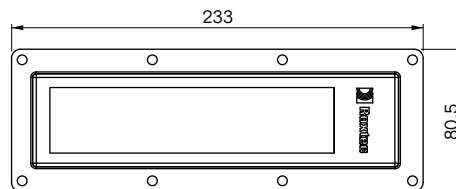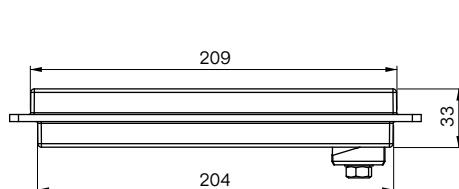

## Acid proof stainless steel




| Kit                            | Multidiameter™ range and number of cables/pipes |                                              | Weight |      | Holecut width x lenght (mm) | Art No.       |
|--------------------------------|-------------------------------------------------|----------------------------------------------|--------|------|-----------------------------|---------------|
|                                | 0+3.5-16.5<br>0+0.138-0.650<br>(CM 20w40)       | 0+9.5-32.5<br>0+0.374-1.280<br>(CM 40 10-32) | (kg)   | (lb) |                             |               |
| <b>ComSeal™ 16/4 AISI 316</b>  |                                                 | 4 cables/pipes                               | 1.407  | 3.11 | 58.5 x 211                  | <b>105679</b> |
| <b>ComSeal™ 16/7 AISI 316</b>  | 4 cables/pipes                                  | 3 cables/pipes                               | 1.407  | 3.11 | 58.5 x 211                  | <b>105680</b> |
| <b>ComSeal™ 16/10 AISI 316</b> | 8 cables/pipes                                  | 2 cables/pipes                               | 1.407  | 3.11 | 58.5 x 211                  | <b>105681</b> |
| <b>ComSeal™ 16/16 AISI 316</b> | 16 cables/pipes                                 |                                              | 1.407  | 3.11 | 58.5 x 211                  | <b>105682</b> |

# Roxtec ComSeal™ 32

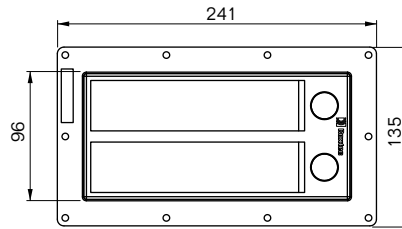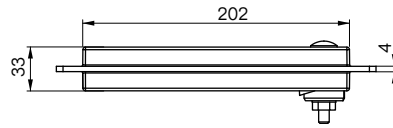

## Aluminum

| Kit            | Multidiameter™ range and number of cables/pipes |                                              | Weight<br>(kg) (lb) |      | Holecut width x length (mm) | Art No. |
|----------------|-------------------------------------------------|----------------------------------------------|---------------------|------|-----------------------------|---------|
|                | 0+3.5-16.5<br>0+0.138-0.650<br>(CM 20w40)       | 0+9.5-32.5<br>0+0.374-1.280<br>(CM 40 10-32) |                     |      |                             |         |
| ComSeal™ 32/8  |                                                 | 8 cables/pipes                               | 1.259               | 2.78 | 103 x 209                   | 105316  |
| ComSeal™ 32/14 | 8 cables/pipes                                  | 6 cables/pipes                               | 1.259               | 2.78 | 103 x 209                   | 105320  |
| ComSeal™ 32/20 | 16 cables/pipes                                 | 4 cables/pipes                               | 1.259               | 2.78 | 103 x 209                   | 105321  |
| ComSeal™ 32/32 | 32 cables/pipes                                 |                                              | 1.259               | 2.78 | 103 x 209                   | 105322  |

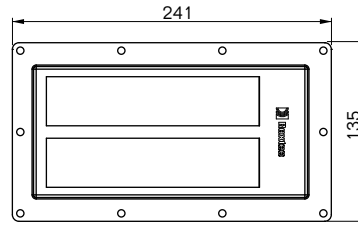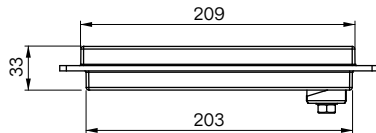

## Acid proof stainless steel

| Kit                     | Multidiameter™ range and number of cables/pipes |                                              | Weight<br>(kg) (lb) |      | Holecut width x length (mm) | Art No. |
|-------------------------|-------------------------------------------------|----------------------------------------------|---------------------|------|-----------------------------|---------|
|                         | 0+3.5-16.5<br>0+0.138-0.650<br>(CM 20w40)       | 0+9.5-32.5<br>0+0.374-1.280<br>(CM 40 10-32) |                     |      |                             |         |
| ComSeal™ 32/8 AISI 316  |                                                 | 8 cables/pipes                               | 2.180               | 4.81 | 107 x 213                   | 105683  |
| ComSeal™ 32/14 AISI 316 | 8 cables/pipes                                  | 6 cables/pipes                               | 2.180               | 4.81 | 107 x 213                   | 105684  |
| ComSeal™ 32/20 AISI 316 | 16 cables/pipes                                 | 4 cables/pipes                               | 2.180               | 4.81 | 107 x 213                   | 105685  |
| ComSeal™ 32/32 AISI 316 | 32 cables/pipes                                 |                                              | 2.180               | 4.81 | 107 x 213                   | 105686  |

### Each Roxtec ComSeal™ kit consists of:

- Roxtec ComSeal™ frame
- Roxtec CM modules
- Screws, nuts and washers
- Gasket
- Assembly gel/Lubricant



**Thorne & Derrick**  
+44 (0) 191 410 4292  
[www.powerandcables.com](http://www.powerandcables.com)