




**Split Bolt Connectors**

The high strength split bolt connectors will accept a wide range of stranded copper conductors. No specialist tools are required for installation.



Main Conductor A mm <sup>2</sup>	Tap Conductor B mm <sup>2</sup>	H mm	W mm	Unit Weight kg	Pack Quantity	Part Number
10	1.5 - 10	20	4.1	0.02	200	<b>SBC 010</b>
16	2.5 - 16	23	5.3	0.03	150	<b>SBC 016</b>
25	2.5 - 25	28	6.8	0.04	100	<b>SBC 025</b>
35	2.5 - 35	29	7.9	0.05	80	<b>SBC 035</b>
50	2.5 - 50	35	9.5	0.08	50	<b>SBC 050</b>
70	2.5 - 70	39	10.7	0.12	35	<b>SBC 070</b>
95	2.5 - 95	45	13.5	0.15	20	<b>SBC 095</b>
120	10 - 120	47	14.7	0.18	20	<b>SBC 120</b>
150	10 - 150	51	16.2	0.23	10	<b>SBC 150</b>
185	50 - 185	57	17.8	0.35	10	<b>SBC 185</b>
240	95 - 240	64	19	0.46	10	<b>SBC 240</b>

**Material:** Gunmetal.

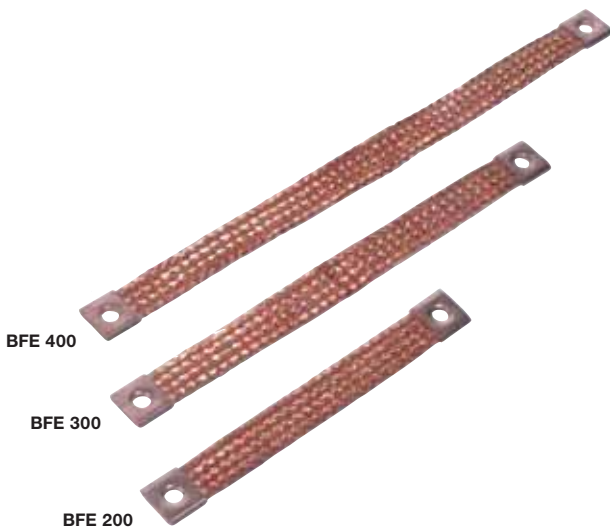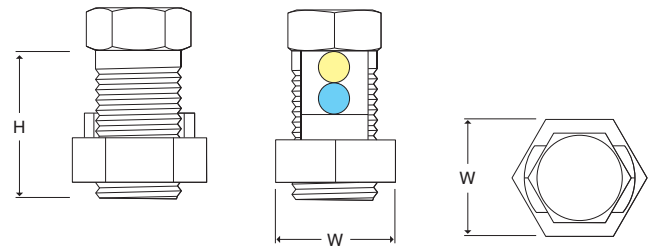

**Flexible Copper Braid Bonds**

These flexible copper braid bonds are used for bonding metal gates, doors, fences etc. Other lengths and sizes are available on request.

Size W x H mm	Hole Centres L mm	Hole Size mm	Unit Weight kg	Pack Quantity	Part Number
25 x 3.5	200	11	0.04	10	<b>BFE 200</b>
	300		0.07		<b>BFE 300</b>
	400		0.15		<b>BFE 400</b>

**Material:** Copper.

