



Split Bolt Connectors

The high strength split bolt connectors will accept a wide range of stranded copper conductors. No specialist tools are required for installation.




Main Conductor A mm ²	Tap Conductor B mm ²	H mm	W mm	Unit Weight kg	Pack Quantity	Part Number
10	1.5 - 10	20	4.1	0.02	200	SBC 010
16	2.5 - 16	23	5.3	0.03	150	SBC 016
25	2.5 - 25	28	6.8	0.04	100	SBC 025
35	2.5 - 35	29	7.9	0.05	80	SBC 035
50	2.5 - 50	35	9.5	0.08	50	SBC 050
70	2.5 - 70	39	10.7	0.12	35	SBC 070
95	2.5 - 95	45	13.5	0.15	20	SBC 095
120	10 - 120	47	14.7	0.18	20	SBC 120
150	10 - 150	51	16.2	0.23	10	SBC 150
185	50 - 185	57	17.8	0.35	10	SBC 185
240	95 - 240	64	19	0.46	10	SBC 240

Material: Gunmetal.

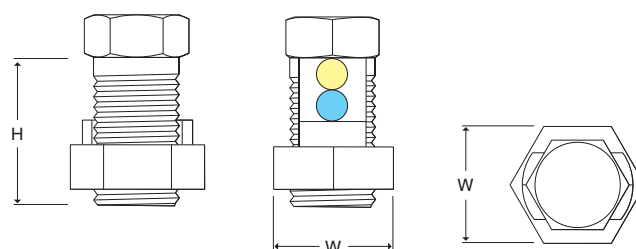

Flexible Copper Braid Bonds

These flexible copper braid bonds are used for bonding metal gates, doors, fences etc. Other lengths and sizes are available on request.

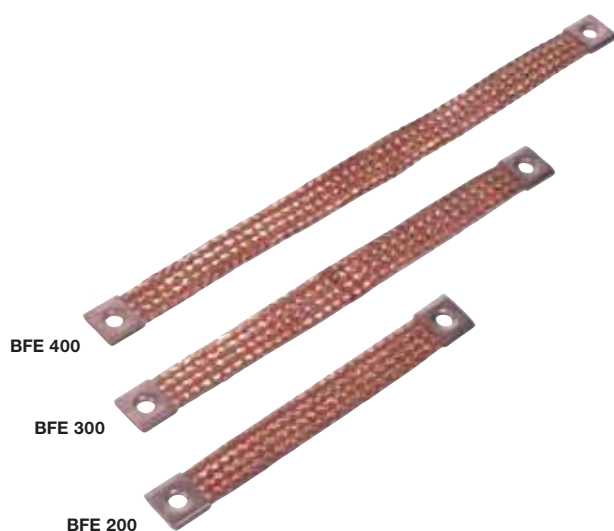

Size W x H mm	Hole Centres L mm	Hole Size mm	Unit Weight kg	Pack Quantity	Part Number
25 x 3.5	200	11	0.04	10	BFE 200
	300		0.07		BFE 300
	400		0.15		BFE 400

Material: Copper.

