




THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

1. Do not scale.
2. This drawing is the property of BCM GRC Ltd and may not be copied altered or distributed without the consent of BCM GRC Ltd.
3. Tolerances -3mm/+ 3mm.
4. All cast in sockets are stainless steel, therefore stainless steel bolts are required in all cases. Isolation washers will need to be implemented where galvanised steel occurs.
5. Torque setting for standard MB ST/ST cast in sockets is 10.6Nm.

NOTES

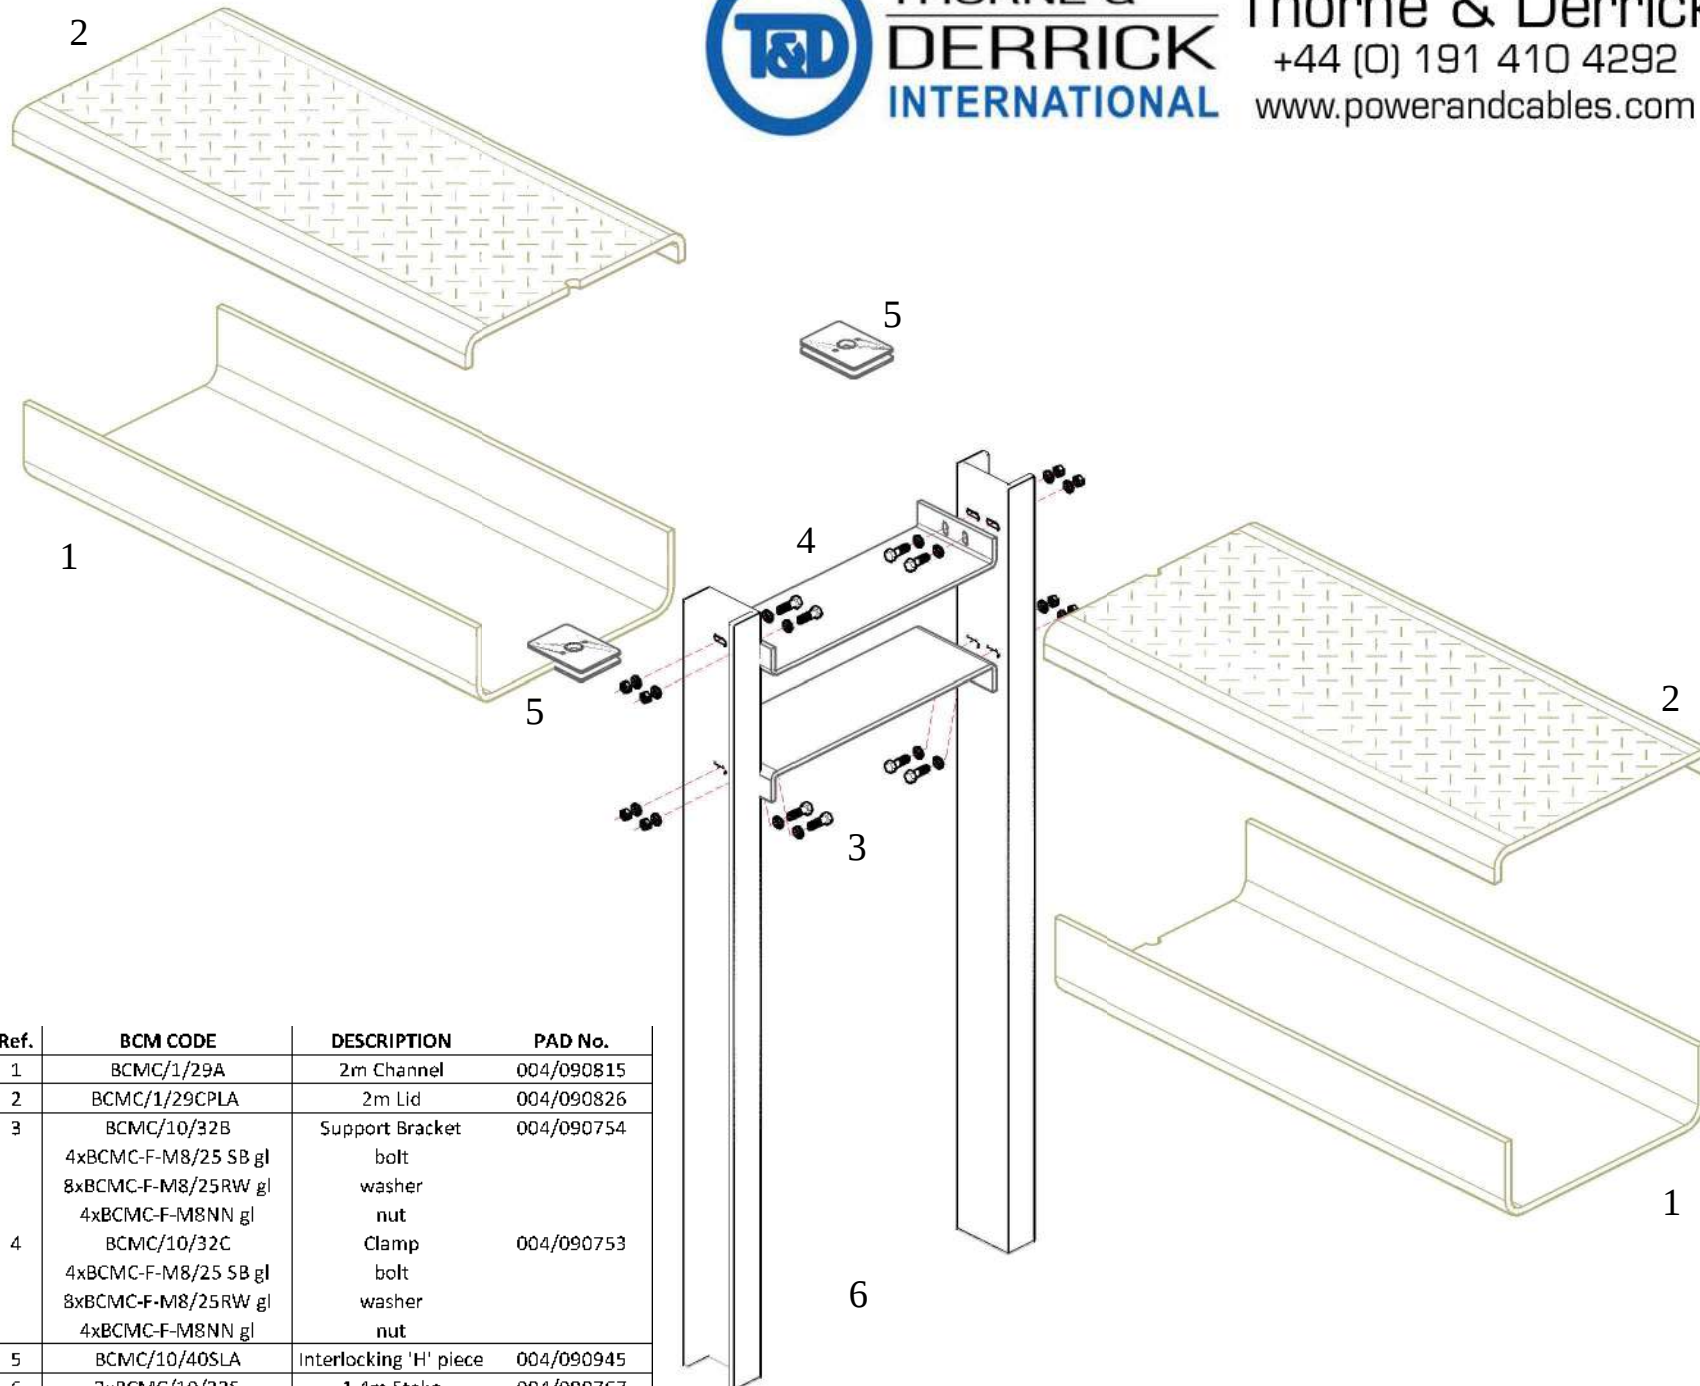

Ref.	BCM CODE	DESCRIPTION	PAD No.
1	BCMC/1/29A	2m Channel	004/090815
2	BCMC/1/29CPLA	2m Lid	004/090826
3	BCMC/10/32B 4xBCMC-F-M8/25 SB gl 8xBCMC-F-M8/25RW gl 4xBCMC-F-M8NN gl	Support Bracket bolt washer nut	004/090754
4	BCMC/10/32C 4xBCMC-F-M8/25 SB gl 8xBCMC-F-M8/25RW gl 4xBCMC-F-M8NN gl	Clamp bolt washer nut	004/090753
5	BCMC/10/40SLA	Interlocking 'H' piece	004/090945
6	2xBCMC/10/32S	1.4m Stake	004/090767

Rev	Description	Date
Drawing Title		
C/1/29 GRC Elevated Channel Troughing Component Detail		
Dwg Status:		Date:
INFORMATION		7/11/13
Product code:		Drawn By:
		C.A
Scale:	Dwg No:	Rev:
NTS	BCMC/1/29-Detail	-