




**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

1. Do not scale.
2. This drawing is the property of BCM GRC Ltd and may not be copied altered or distributed without the consent of BCM GRC Ltd.
3. Tolerances -3mm/+3mm.
4. All cast in sockets are stainless steel, therefore stainless steel bolts are required in all cases. Isolation washers will need to be implemented where galvanised steel occurs.
5. Torque setting for standard M8 ST/ST cast in sockets is 10.6Nm.

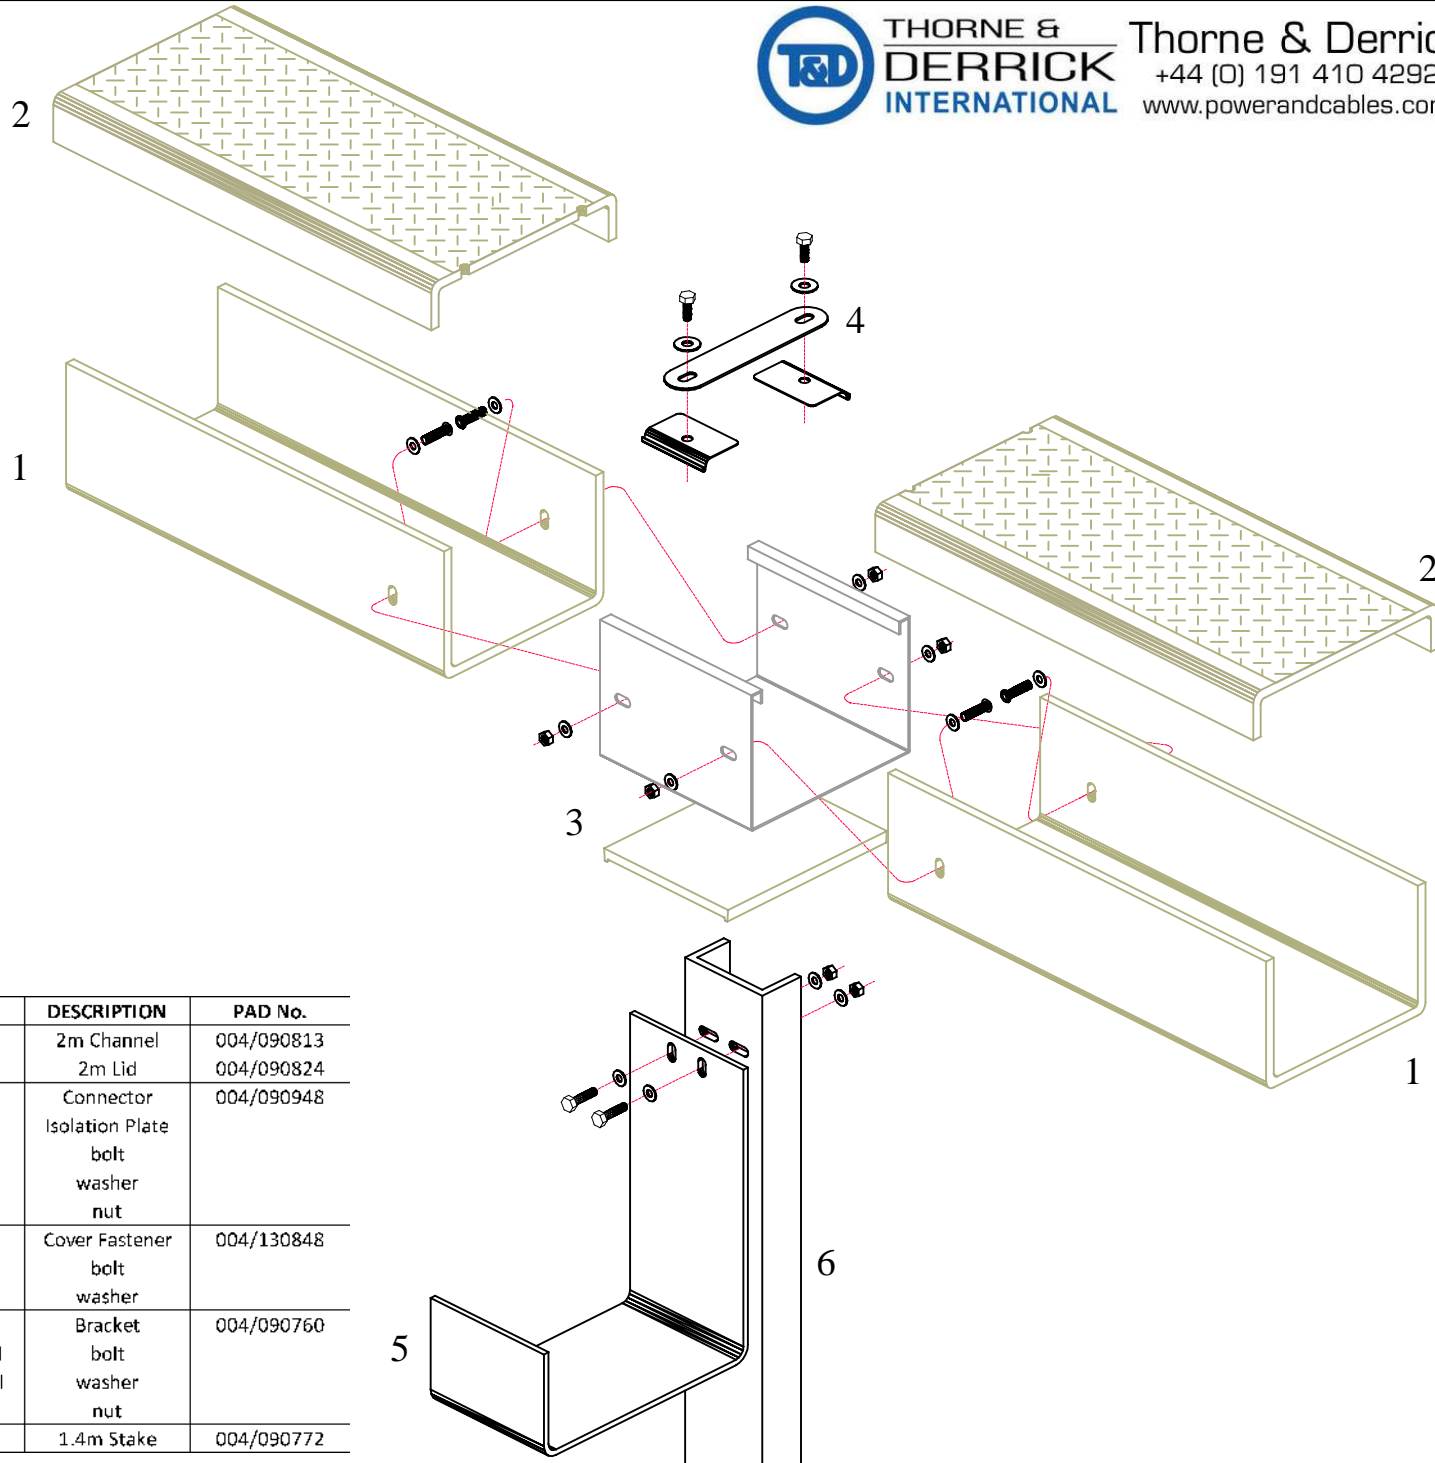

Ref.	BCM CODE	DESCRIPTION	PAD No.
1	BCMC/1/9A	2m Channel	004/090813
2	BCMC/1/9CPLA	2m Lid	004/090824
3	BCMC/10/29MCA BCMC/02/29	Connector Isolation Plate	004/090948
	4xBCMC-F-M8/20 BHS	bolt	
	8xBCMC-F-M8/25 RW	washer	
	4xBCMC-F-M8NN	nut	
4	BCMC/10/29CF 2xBCMC-F-M8/20 SB 2xBCMC-F-M8/25 RW	Cover Fastener bolt washer	004/130848
5	BCMC/10/29BA 2xBCMC-F-M8/25 SB gl 4xBCMC-F-M8/25RW gl 2xBCMC-F-M8NN gl	Bracket bolt washer nut	004/090760
6	BCMC/10/01SA	1.4m Stake	004/090772

NOTES

Rev	Description	Date

Drawing Title

C/1/9 GRC Elevated Channel
Troughing Component Detail

Dwg Status:	INFORMATION	Date:	7/11/13
-------------	-------------	-------	---------

Product code:	C.A	Drawn By:	C.A
---------------	-----	-----------	-----

Scale:	NTS	Dwg No:	BCMC/1/9-Detail	Rev:	-
--------	-----	---------	-----------------	------	---