




THORNE &  
**DERRICK**  
INTERNATIONAL

Thorne & Derrick  
+44 (0) 191 410 4292  
www.powerandcables.com

# MC040SLF

single phase cut out

fused products MC040SLF

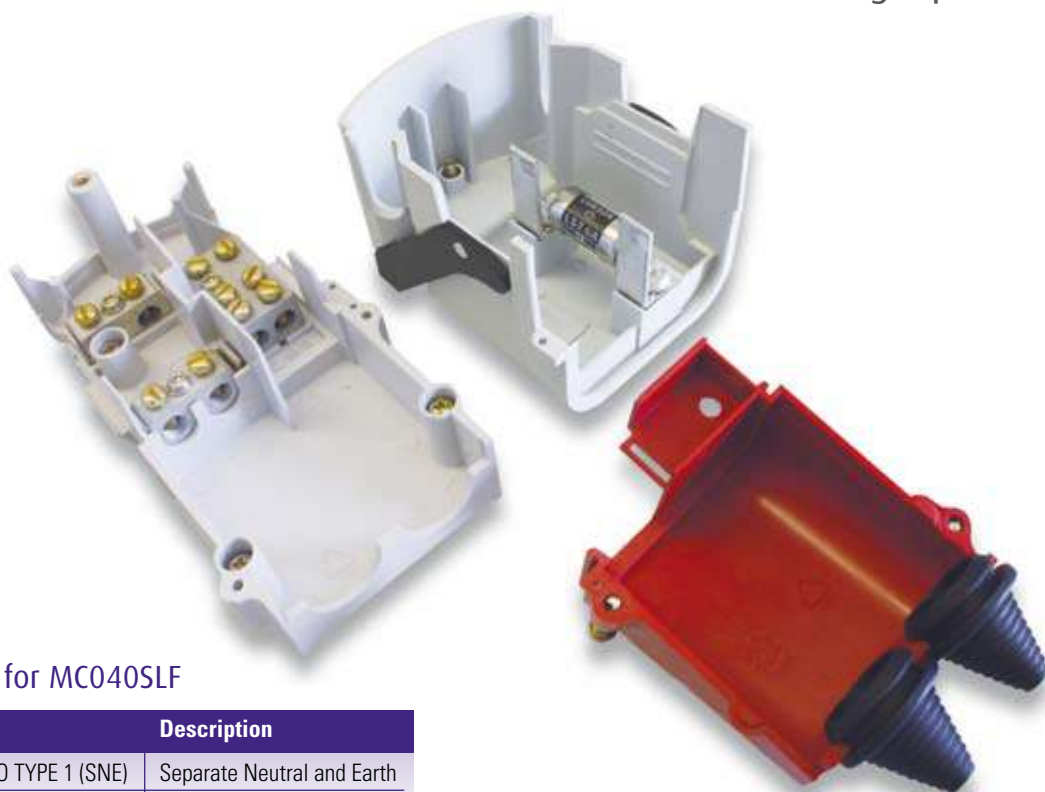

## Order details for MC040SLF

Order code	Description
MC040SLF 25A SLCO TYPE 1 (SNE)	Separate Neutral and Earth
MC040SLF 25A SLCO TYPE 2 (CNE)	Combined Neutral and Earth

Fuses to fit the MC040SLF are obtainable under the following part numbers:

LST2 AMP	LST10 AMP	LST25 AMP
LST4 AMP	LST16 AMP	
LST6 AMP	LST20 AMP	

## Specification

Designed and tested in accordance with BS 7654:1997

25A maximum fuse rating

Accepts fuse links to BS 88 Part 1, AC 16 tag type

IP22 rating

Single Pole isolation

Single fuse

Electroplated brass terminals with serrated bores

Maximum cable size; 16mm<sup>2</sup> stranded copper or 25mm<sup>2</sup> solid aluminium conductors

Cable entry via PVC grommets as standard

Outgoing cables exit below horizontal to form drip loop

Sealing wire facility

## Dimensions

Height 150mm

Width 76mm

Depth 60mm



LST fuse