



IEC 61230



## Installation on permanent fixed points

Reference	Rating (kA/1 s)	Installation on fixed points	Composition	Connection set
MT-1910	20	Ø 20 mm MT-2951 range	3 clamps MT-1911-E 1 MT-1911	3 cables 95 mm <sup>2</sup> 1 earth cable 35 mm <sup>2</sup>
MT-1920	30	Ø 25 mm MT-3951 range	3 clamps MT-1921-E 1 MT-1921	3 cables 150 mm <sup>2</sup> 1 earth cable 50 mm <sup>2</sup>

Delivered in case



3 fixed points.

### Installation on permanent fixed points

Reference	Description
MT-890	Clamps 3 claws
MT-891	Earth clamp fixation
MT-893	Cable tensioner
MT-895	Cable kit support
CI-10-D	Wall mounted support
M-78665	Plastic case MT-1910 or MT-1920

Fixed points  
(characteristic page 134).



MT-2951

MT-3951

Plastic case.



M-78665

3 contact clamps.



MT-1910  
MT-1920

3 copper cables MCC,  
IEC extra flexible  
silicone sheath,  
L = 1.5 m.

CF-5-40-E

Insulating stick.

Earth clamp.

1 trifurcation connector  
earthed by an extra-flexible  
copper cable with silicone  
sheath, L = 2.5 m.

## Earth clamps

Claw for "T" or round fixed points for round conductors.

Reference	Characteristic	Rating (kA/1 s)	
MT-1911-E	Claw for "T" fixed points MT-1951... Ø 20 mm MT-2951... round fixed points Ø 8 à 18 mm	20	580
MT-1921-E	Claw for "T" fixed points MT-1951... round fixed points Ø 25 mm MT-3951... round conductors Ø 10 à 25 mm	30	690
MT-1911	Same characteristics with handle MT-1911-E	20	-
MT-1921	Same characteristics with handle MT-1921-E	30	-
M-9573	Handle alone C and fitting	-	-

Delivered with screws M 12.



MT-1911-E  
MT-1921-E

MT-1911  
MT-1921

## Installation on bare conductors

IEC 61230




Reference	Rating (kA/1 s)	Installation on fixed points	Composition	Connection set
MT-5805	20	<ul style="list-style-type: none"> <li>• Ø 5-35</li> <li>— 16-40</li> <li>— 5-40</li> </ul>	3 clamps <b>MT-815-C</b> 1 <b>MT-840/1</b>	3 cables 95 mm <sup>2</sup> 1 earth cable 35 mm <sup>2</sup>
MT-8408	12,5	<ul style="list-style-type: none"> <li>• Ø 18-33</li> <li>—</li> <li>—</li> </ul>	3 clamps <b>MT-814/3</b> 1 <b>MT-840/1</b>	3 cables 70 mm <sup>2</sup> 1 earth cable 35 mm <sup>2</sup>
MT-9801	10	<ul style="list-style-type: none"> <li>• Ø 5-16</li> <li>— 0-16</li> <li>• Ø 5-28</li> </ul>	3 clamps <b>MT-817-C</b> 3 clamps <b>MT-814/2</b> 1 <b>MT-840/1</b>	3 cables 50 mm <sup>2</sup> 1 earth cable 25 mm <sup>2</sup>

Delivered in case.  
Clamp characteristics : see page 133.

### Installation on permanent fixed points

Reference	Description
MT-890	Clamps 3 claws
MT-891	Earth clamp fixation
MT-893	Cable tensioner
MT-895	Cable kit support
CI-06-D	Wall mounted support

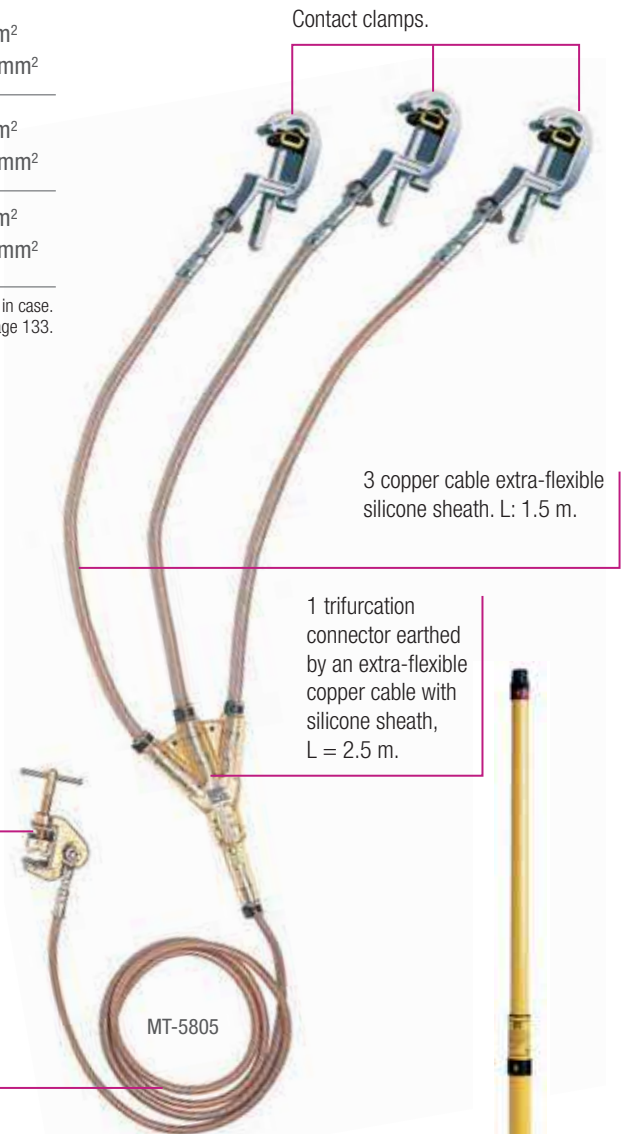

Insulating stick to be ordered separately.

