


**THROUGH CONNECTORSTYPE L-M
for copper conductors**



Sections and Dimensions:

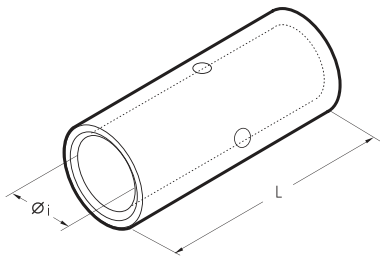

Conductor Size sqmm		Ref.	Dimensions mm	
low stranded	Flexible		Øi	L
0,25÷1,5	0,25÷1,5	L 03-M*	1,8	15
1,5÷2,5	1,5÷2,5	L 06-M*	2,4	15
4÷6	4÷6	L 1-M*	3,6	22
10	10	L 2-M	4,6	25
16	16	L 3-M	5,8	27
25	25	L 5-M	7,0	29
35	25÷35	L 7-M	8,9	33
50	35÷50	L 10-M	10,0	37
70	50÷70	L 14-M	11,3	39
95	70÷95	L 19-M	13,5	43
120	95÷120	L 24-M	15,2	47
150	120÷150	L 30-M	16,7	58
185	150÷185	L 37-M	19,2	64
240	185÷240	L 48-M	21,1	75
300	240÷300	L 60-M	23,7	90
400	300÷400	L 80-M	27,0	94
500	400÷500	L 100-M	30,3	98
630	500÷630	L 120-M*	33,4	105
800	600	L 160-M*	38,0	112
1000	800	L 200-M*	44,0	120

*Not UL Approved

Description:

- L-M range of connectors are designed for jointing low voltage conductors.
- Are manufactured from electrolytic copper tube Cu-OF CW008A conform to UNI EN 13600:2003.
- Are electrolytically tin plated with a minimum thickness of 3µm to avoid oxidation.
- Cembre connectors are annealed to guarantee optimum ductility which is an absolute necessity for connectors which will have to withstand the severe deformation arising when compressed and any bending of the palm during installation.
- They feature an internal taper at both ends to ease the introduction of the conductor and a central stop to ensure correct positioning.

Markings:

- Conform to products norm IEC 61238-1



- According to UL 486A standard (file E125401)



**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com