


## INSTALLATION ON PERMANENT FIXED POINTS

3 contact clamps. 3 copper cables, IEC extra flexible silicone sheath, L = 1.5 m. Insulating stick. Earth clamp.  
1 trifurcation connector earthed by an extra-flexible copper cable with silicone sheath, L = 2.5 m.



Reference	Rating (kA/1 s)	Installation on fixed points (mm)	Composition	Connection set
MT-1910	20	Ø 20 MT-2951 range	3 clamps MT-1911-E 1 MT-1911	3 cables 95 mm <sup>2</sup> 1 earth cable 35 mm <sup>2</sup>
MT-1920	30	Ø 25 MT-3951 range	3 clamps MT-1921-E 1 MT-1921	3 cables 150 mm <sup>2</sup> 1 earth cable 50 mm <sup>2</sup>

Fixed points  
(characteristic page 160).



MT-2951



MT-3951



Plastic case.  
M-78665



CF-5-40-E  
Insulating stick to be  
ordered separately.

IEC 61230



## EARTH CLAMPS

Claw for "T" or round fixed points for round conductors.

Reference	Characteristic	Rating (kA/1 s)	kg
MT-1911-E	Claw for "T" fixed points Ø 20 mm round conductors Ø 8 to 18 mm	20	0.58
MT-1921-E	Claw for "T" fixed points Ø 25 mm round conductors Ø 10 to 25 mm	30	0.69
MT-1911	Same characteristics with handle MT-1911-E	20	-
MT-1921	Same characteristics with handle MT-1921-E	30	-
M-9573	Handle alone C end fitting	-	-



MT-1911-E  
MT-1921-E



MT-1911  
MT-1921

IEC 61230



Weight



Packaging



## INSTALLATION ON BARE CONDUCTORS

Contact clamps. 3 copper cable extra-flexible silicone sheath. L = 1.5 m. 1 trifurcation connector earthed by an extra-flexible copper cable with silicone sheath, L = 2.5 m. Earth clamp.

IEC 61230



Reference	Rating (kA/1 s)	Installation on fixed points	Composition	Connection set
MT-5805	20	<ul style="list-style-type: none"> <li>● Ø 5-35</li> <li>■ 16-40</li> <li>■ 5-40</li> </ul>	3 clamps MT-815-C 1 MT-840/1	3 cables 95 mm <sup>2</sup> 1 earth cable 35 mm <sup>2</sup>
MT-8408	12.5	<ul style="list-style-type: none"> <li>● Ø 18-33</li> <li>■ -</li> <li>■ -</li> </ul>	3 clamps MT-814/3 1 MT-840/1	3 cables 70 mm <sup>2</sup> 1 earth cable 35 mm <sup>2</sup>
MT-9801	10	<ul style="list-style-type: none"> <li>● Ø 5-16</li> <li>■ 0-16</li> <li>● Ø 5-28</li> </ul>	3 clamps MT-817-C 3 clamps MT-814/2 1 MT-840/1	3 cables 50 mm <sup>2</sup> 1 earth cable 25 mm <sup>2</sup>

Delivered in case. Clamp characteristics : see page 159.

### Installation on permanent fixed points:


Reference	Characteristic
MT-890	Clamps 3 claws
MT-891	Earth clamp fixation
MT-893	Cable tensioner
MT-895	Cable kit support
CI-06-D	Wall mounted support



MT-5805



CE-4-21-C  
Insulating stick to be ordered separately.

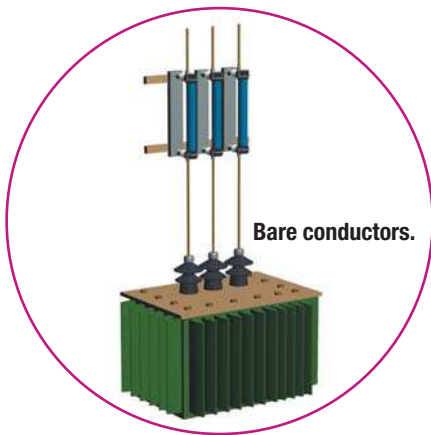

Bare conductors.



Plastic case included.  
M-78665