


Service Straight -  
Side Entry

## MECHANICAL CONNECTORS



### MF19/2 & MF19/2/SHR Connector

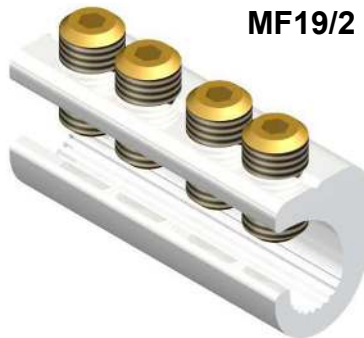

MF19/2



MF19/2/SHR

#### Principle Application:

Stranded and solid circular conductors.

#### Range:

Product Reference	Type	Core C.S.A. (mm <sup>2</sup> )	
		Min	Max
MF19/2 & MF19/2/SHR	Straight Through	4*	35

Note: For jointing other core configurations/sizes please contact Sicame Technical Dept

The **Hepworth MF19/2** mechanical connector is designed for straight connections on stranded or solid cable. The aluminium connector yoke is electro-tinned as standard and is supplied with brass grub screws making it suitable for jointing both copper and aluminium conductor cores.

The **Hepworth MF19/2/SHR** mechanical connector has a factory fitted lower polypropylene shroud with a 'snap on' upper to fully insulate the assembled connector.

#### Secondary Application:

Stranded and solid shaped conductors.

Product Reference	Type	Core C.S.A. (mm <sup>2</sup> )	
		Min	Max
MF19/2 & MF19/2/SHR	Straight Through	4*	35

Note: For jointing other core configurations/sizes please contact Sicame Technical Dept



**THORNE &  
DERRICK**  
INTERNATIONAL


**Thorne & Derrick**  
+44 (0) 191 410 4292  
www.powerandcables.com

Service Straight -  
Side Entry

## MECHANICAL CONNECTORS

### MF19/2 & MF19/2/SHR Connector

Physical Dimensions:

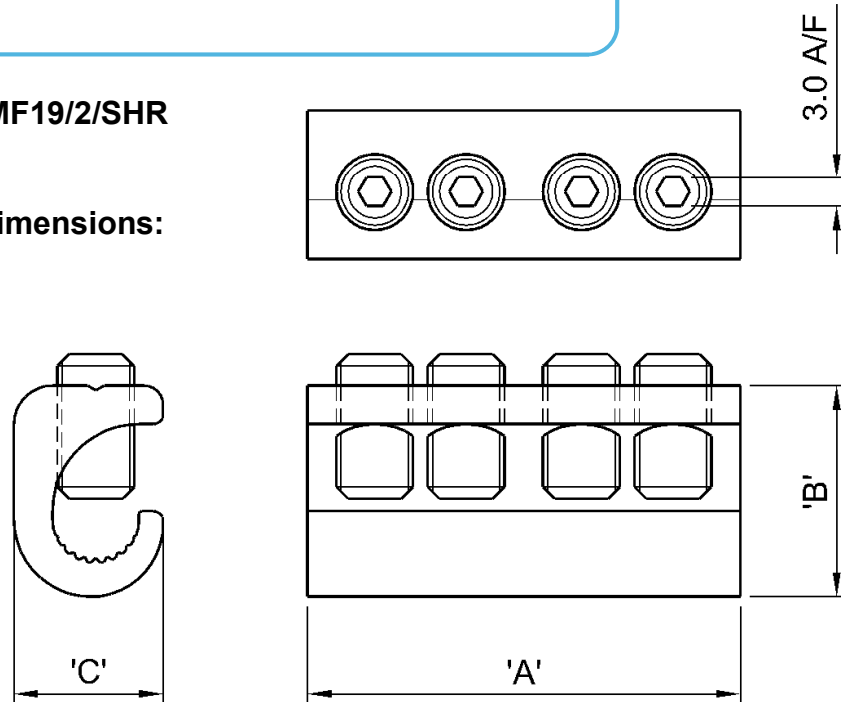

Connector Reference	Dimensions (mm)		
	'A'	'B'	'C'
MF19/2 & MF19/2/SHR	45.0	22.0	15.5

#### Material:

**Body:** Aluminium Alloy (Tinned) (MF19/2 & MF19/2/SHR)

**Screws:** Brass

**Shroud:** Polypropylene

#### Test Specification:

IEC1238-1: Test Reports TTR/257, 266 and 277

#### Fitting Instructions:

1. Cut the cables to length and strip the core insulation equal to half the length of the connector +3mm.
2. Thoroughly abrade all conductors to be jointed.
3. Align cores within connector and tighten screws on each side of the connector consecutively, until tight.

#### Note:

\*Conductor cores 4mm<sup>2</sup> and below should be doubled, and if necessary doubled again, to achieve the necessary cross-sectional area.



THORNE &  
DERRICK  
INTERNATIONAL

Thorne & Derrick  
+44 (0) 191 410 4292  
www.powerandcables.com