

APPLICATION

Separable straight plug designed to connect polymeric insulated cable to cable.

Mates with the elbow, straight and branch joint connectors.


TECHNICAL CHARACTERISTICS

- The thick conductive EPDM jacket provides a total safe to touch screen which ensures safety for personnel.
- Each straight plug is tested for AC withstand and partial discharge prior to leaving the factory.

DESIGN

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer moulded between the insert and the jacket.
4. Type A interface as described by CENELEC EN 50180 and 50181.
5. Conductor connector.

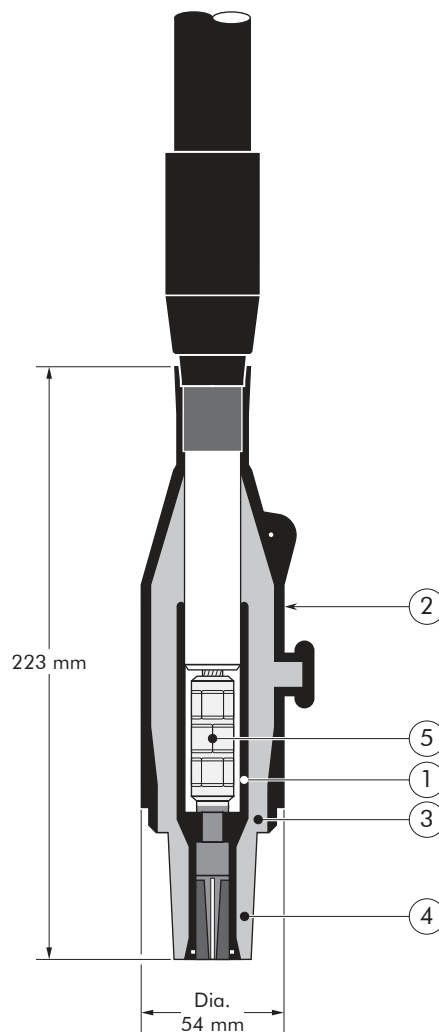

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Up to 24 kV - 200 A

EUROMOLD®

Separable plug type	Voltage Um (kV)	Current Ir (A)	Conductor sizes (mm ²)	
			min	max
151SP	12	200	16	95
K151SP	24	200	16	95

05/2017

KIT CONTENTS

The complete (K)151SP straight plug kit comprises the following components:

The kit also comprises lubricant, wipers, installation instructions and crimp chart.



+



+



=

(K)151SP-W-X+11TL
straight plug kit

Straight plug housing
(K)151SPH-W

Conductor
contact
151SPC-X

Cable
adaptor
11TL

ORDERING INSTRUCTIONS

Select the part number which gives the best centring to the cable core insulation diameter and substitute **X** using table X, according to the conductor size and type.

Add a 'K' for use up to 24 kV.

TABLE W


Ordering part number	Dia. over core insulation (mm)	
	min	max
151SP-A-X+11TL-FA/FAB	14.6	18.7
151SP-B-X+11TL-FB/FG	17.2	21.2
151SP-B-X+11TL-GA/GAB	19.7	23.0
151SP-C-X+11TL-GB/GH	22.2	26.4

EXAMPLE:


The copper wire screened cable is 12 kV, 50 mm² stranded aluminium with a diameter over core insulation of 16.9 mm.
Order a 151SP-A-50(K)M-12-2+11TL-FA/FAB straight plug kit.

TABLE X

Conductor sizes (mm ²)	Aluminium		Copper
	DIN hexagonal	Deep indent	DIN hexagonal
16	-	-	16(K)M-11-2
25	25(K)M-12-2	25KM-12-1	25(K)M-11-2
35	35(K)M-12-2	35KM-12-1	35(K)M-11-2
50	50(K)M-12-2	50(K)M-12-1	50(K)M-11-2
70	70(K)M-12-2	70(K)M-12-1	70(K)M-11-2
95	95(K)M-12-2	95(K)M-12-1	95(K)M-11-2




For use with
copper tape
screened cables.
Order: Kit MT.



For use with Alupe or
C 33-226 cables.
Please contact our
representative.



For use with
other cable types.
Please contact our
representative.



For adapted
bail restraints:
see 'Bail restraints and
typical applications'.



For outdoor
applications.
Order: +MWS.



Components can be
ordered individually.



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com