

# 400AR-8

## INTERFACE B EQUIPMENT BUSHING

### APPLICATION


For use in equipment insulated with oil fluid, typically for transformers, switchgear, capacitors...

### TECHNICAL CHARACTERISTICS

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.

### SPECIFICATIONS AND STANDARDS

The plug-in type equipment bushings 400AR-8 are moulded epoxy insulated parts and meet the requirements of CENELEC EN 50180 and IEC 60137.

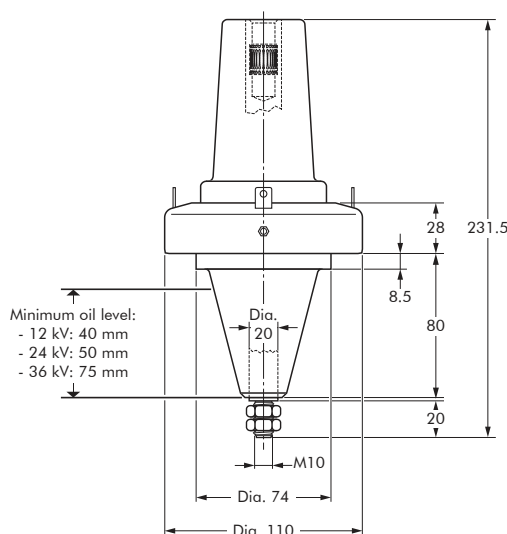

6/10 (12) kV  
6,35/11 (12) kV  
8,7/15 (17,5) kV  
12/20 (24) kV  
12,7/22 (24) kV

Up to 36 kV - 250 A

**EUROMOLD®**

### ORDERING INSTRUCTIONS

To order the equipment bushing, specify the type.

The bushings can be supplied with an earth jumper (/J).

E.g. M400AR-8/J.



In mm.

Equipment bushing type	Voltage Um (kV)	Current Ir (A)
400AR-8	12	250
K400AR-8	24	250
M400AR-8	36	250

05/2017

# FIXINGS FOR EQUIPMENT BUSHINGS

## 400AR-8/J BUSHING

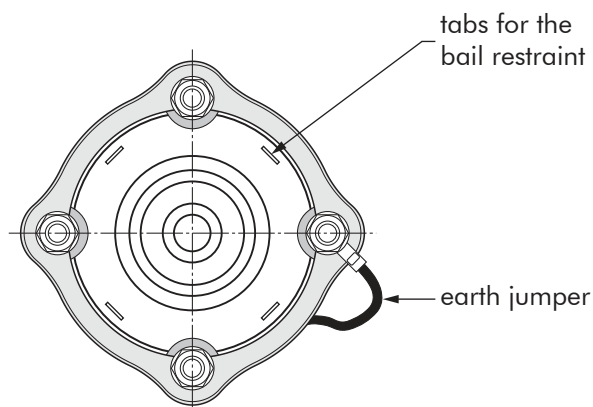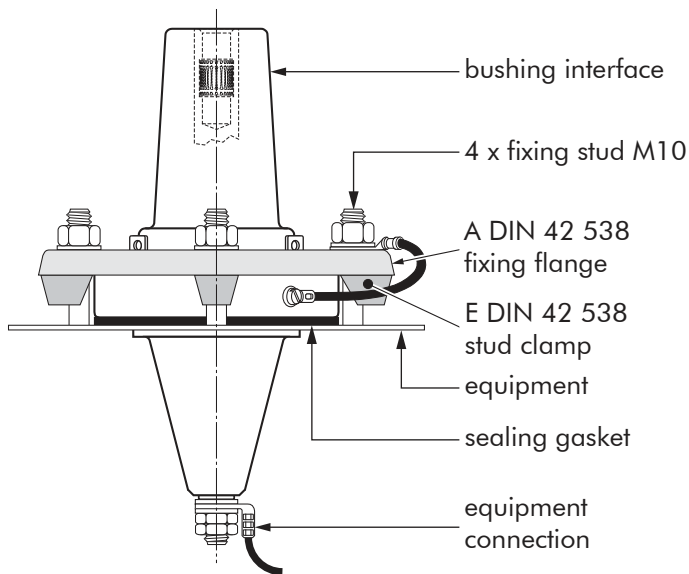


## BUSHING CLAMPING KIT

To order the bushing clamping kit, according to DIN 42 538 standards, simply specify: KBCD-200.

Contents: - 1 x fixing flange A  
- 4 x stud clamp E  
- 1 x sealing gasket.

## FIXING DIMENSIONS STANDARDS DIN 42 538

German standards.

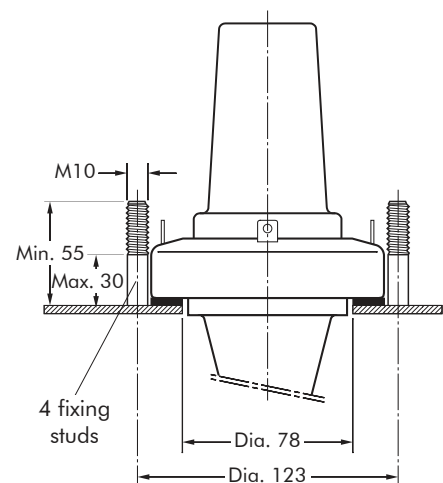

In mm.



THORNE &  
**DERRICK**  
INTERNATIONAL

Thorne & Derrick  
+44 (0) 191 410 4292  
[www.powerandcables.com](http://www.powerandcables.com)