

HV cables Tools

LHS4



Section

HV Semi-conductor

Application

Field



PRODUCT BENEFITS

Back-iron to set the pitch of the tool in order to get a good result over the insulation

TOOL CAPACITY

Diameter 80 - 110 mm
3,150 - 4,331 inch

Max cutting depth 12 mm / 0,473 in

TOOL DIMENSIONS

Length 640 mm

Width 155 mm

Height 95 mm


Weight without box 4,5 Kg

Packaging None

Tool for bonded non peelable semiconductor with silicone

TO DO WHAT

The LHS4 enables the user to remove bonded semiconductor realizing a right stop. Using the tool with silicone

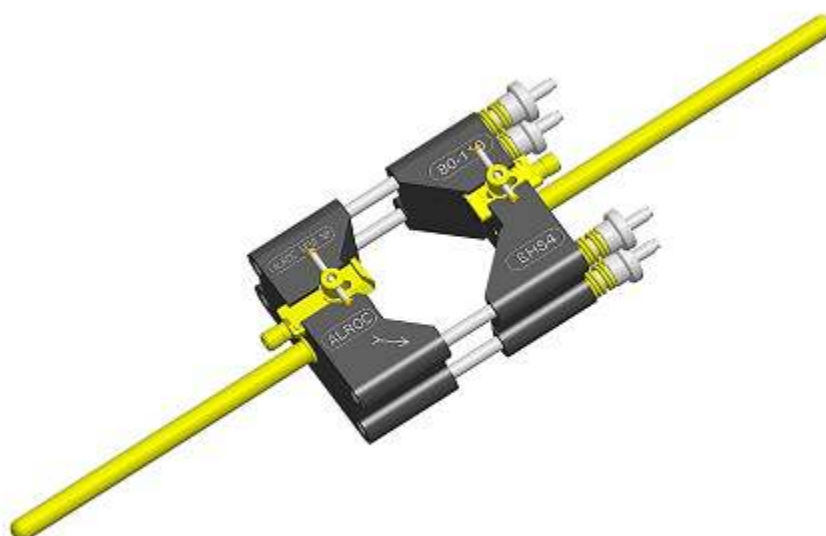

Spare part

LASC4 - Blade for non-peelable semiconductor

Associated tool

LH4 - Monofunction tool for insulation

DM 95-145 - Stripping tool for HV and EHV cable's outer sheath and shield

BMF4 - Thrust to stop the tool



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

HV cables Tools

LHS4



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Max cutting depth	Length	Width	Height	
LHS2	38 - 60 mm 1,496 - 2,362 in	5 mm / 0,197 in	425 mm 16,732 in	105 mm 4,134 in	85 mm 3,346 in	none
LHS3	60 - 80 mm 2,362 - 3,150 in	10 mm / 0,394 in	460 mm 18,110 in	130 mm 5,118 in	85 mm 3,346 in	none
LHS4	80 - 110 mm 3,150 - 4,331 in	12 mm / 0,473 in	640 mm 25,197 in	155 mm 6,102 in	95 mm 3,740 in	none
LHS5	100 - 140 mm 3,937 - 5,512 in	8 mm / 0,315 in	730 mm 28,740 in	195 mm 7,677 in	115 mm 4,528 in	none



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com