

Surge arrester

POLIM-D..PI-3 Outdoor



Overvoltage protection of

- Metal clad medium voltage switchgear

Application

- Alternating current (AC)
- Outdoor and indoor

Technical data

Surge arrester with metal oxide resistors without spark gaps (MO surge arrester), touch proof metal clad design, designed and tested according to IEC 60099-4.

Nominal discharge current I_n 8/20 μ s	10 kA peak
Line discharge class (LD)	1
High current impulse I_{hc} 4/10 μ s	65 kA peak
Long duration current impulse	250 A / 2000 μ s
Short circuit rating I_s 50 Hz	16 kA rms for 0.2 s

The thermal stability of the MO surge arrester is proved in the operating duty test with a high current impulse $I_{hc} = 65$ kA, which gives an energy input of 2.6 kJ/kV (U_c).

Power frequency voltage versus time characteristic (TOV) with prior energy input

$t = 1$ s	$U_{TOV} = 1.32 \times U_c$
$t = 3$ s	$U_{TOV} = 1.28 \times U_c$
$t = 10$ s	$U_{TOV} = 1.25 \times U_c$

General data

Ambient air temperature	-40 to + 40 °C (for higher values contact manufacturer)
Frequency of system voltage	16.7/50/60 Hz
Weather ageing test	Metal housing tested according to test series A (1000 h salt fog)
IP grade (EN 60529)	IP 67



Thorne & Derrick
 +44 (0) 191 410 4292
www.powerandcables.com


Electrical data

U_c Continuous operating voltage	U_r Rated voltage	Residual voltage U_{res} in kV peak at specified impulse current									
		wave 1/... μ s		wave 8/20 μ s					wave 30/60 μ s		
kV	kV	5 kA	10 kA	1 kA	2,5 kA	5 kA	10 kA	20 kA	125 A	250 A	500 A
rms	rms	peak	peak	peak	peak	peak	peak	peak	peak	peak	peak
24	30.0	86.6	95.8	69.8	74.0	78.2	84.0	95.4	62.2	64.3	66.4
26	32.5	93.8	103.8	75.6	80.1	84.7	91.0	103.3	67.4	69.7	71.9
28	35.0	101.0	111.8	81.4	86.3	91.2	98.0	111.3	72.6	75.0	77.5
29	36.3	104.6	115.8	84.3	89.4	94.4	101.5	115.3	75.2	77.7	80.2
30	37.5	108.2	119.7	87.2	92.4	97.7	105.0	119.2	77.7	80.4	83.0
32	40.0	115.4	127.7	93.0	98.6	104.2	112.0	127.2	82.9	85.7	88.5
34	42.5	122.6	135.7	98.8	104.8	110.7	119.0	135.1	88.1	91.1	94.1
36	45.0	129.8	143.7	104.6	110.9	117.2	126.0	143.1	93.3	96.4	99.6
38	47.5	137.0	151.7	110.4	117.1	123.7	133.0	151.0	98.5	101.8	105.1
40	50.0	144.2	159.6	116.2	123.2	130.2	140.0	158.9	103.6	107.1	110.6
41	51.3	147.9	163.6	119.2	126.3	133.5	143.5	162.9	106.2	109.8	113.4
42	52.5	151.5	167.6	122.1	129.4	136.8	147.0	166.9	108.8	112.5	116.2

Housing

U_c Continuous operating voltage	Length L	Weight	Diameter D	Insulation withstand voltage of empty housing		
				1.2/50 μ s	50 Hz, 60 s	DC voltage, 15 m
kV rms	mm	kg	mm	kV peak	kV rms	kV DC
24	595	5.5	100	250	95	103
26	694	≤ 7.3	100	250	95	103
28	694	≤ 7.3	100	250	95	103
29	694	≤ 7.3	100	250	95	103
30	694	≤ 7.3	100	250	95	103
32	694	≤ 7.3	100	250	95	103
34	694	≤ 7.3	100	250	95	103
36	694	≤ 7.3	100	250	95	103
38	738	≤ 8.0	100	250	95	103
40	738	≤ 8.0	100	250	95	103
41	738	≤ 8.0	100	250	95	103
42	738	≤ 8.0	100	250	95	103

Dimensions (mm)

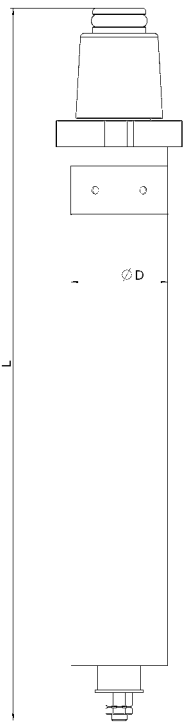


Standard dimensions according outline drawing 1HC0087173
(may be subject to changes)

Structure of type designation

POLIM-D 36 PI-3 Outdoor

Type of arrester _____
 U_c = Continuous operating voltage _____
 Housing _____
 Cone size _____
 Application _____



For further information please contact:

**ABB Switzerland Ltd
High Voltage Products**

Surge Arresters

Jurastrasse 45

CH-5430 Wettingen/Switzerland

Tel. +41 58 585 29 11

Fax +41 58 585 55 70

E-mail: sales.sa@ch.abb.com

www.abb.com/arrestersonline

For detailed information regarding the dimensioning of our products see the following ABB documents:

- Application guidelines
Overvoltage protection
Metal oxide surge arresters in medium voltage systems
- Application guidelines
Overvoltage protection
Metal oxide surge arresters in railway facilities

For pdf or print version please send E-mail to:
sales.sa@ch.abb.com

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright © 2013 ABB

All rights reserved

Our products are certified according ISO 9001, 14001, 18001 and IRIS

1HC009393 E01 AB



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick

+44 (0) 191 410 4292

www.powerandcables.com

Power and productivity
for a better world™

