




## MV - Bonded semi-conductor ASC R1 - ASC R2

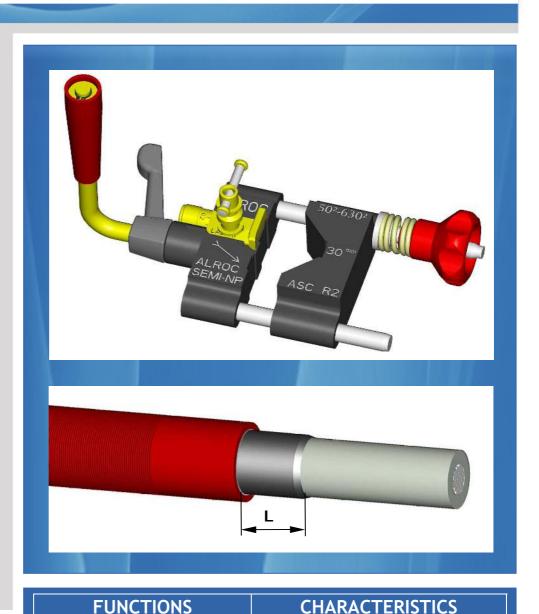

## ASC tool removes the bonded semi-conductor from MV and HV cables and chamfers the semi-

conductor in a clean and swift manner.

## **CHARACTERISTICS**

- Removal of the bonded semiconductor
- The blade is adjustable from 0.4 mm to 1.4 mm
- Remaining length of semiconductor: 30 or 40 mm without adjustment

| ASC    |  |  |
|--------|--|--|
| CHOICE |  |  |

|   | Model                | ASCR1                              | ASCR2                              |
|---|----------------------|------------------------------------|------------------------------------|
|   | Ø sur semi-conductor | 14 à 44 mm                         | 20 à 50 mm                         |
|   | Sections             | 25 <sup>2</sup> à 240 <sup>2</sup> | 50 <sup>2</sup> à 630 <sup>2</sup> |
| J | Length               | 205 mm                             | 220 mm                             |
|   | Width                | 110 mm                             | 120 mm                             |
|   | Height               | 135 mm                             | 135 mm                             |
|   | Weight               | 620 g                              | 800 g                              |