

400AR-4 INTERFACE C2 EQUIPMENT BUSHING

Up to 36 kV - 1250 A

Application

For use in equipment insulated with oil fluid, typically for transformers, switchgear, capacitors...

Technical characteristics

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.


6/10	(12)	kV
6.35/11	(12)	kV
8.7/15	(17.5)	kV
12/20	(24)	kV
12.7/22	(24)	kV
18/30	(36)	kV
18/33	(36)	kV

Specifications and standards

The bolted type equipment bushings 400AR-4 are moulded epoxy insulated parts and meet the requirements of CENELEC EN 50180 and IEC 60137.

Ordering instructions

To order the equipment bushing, specify the type. The bushings can be supplied with an earth jumper (/J) or an earth plate (/GS). This earth connection must be specified when ordering.
E.g. M400AR-4/GS.

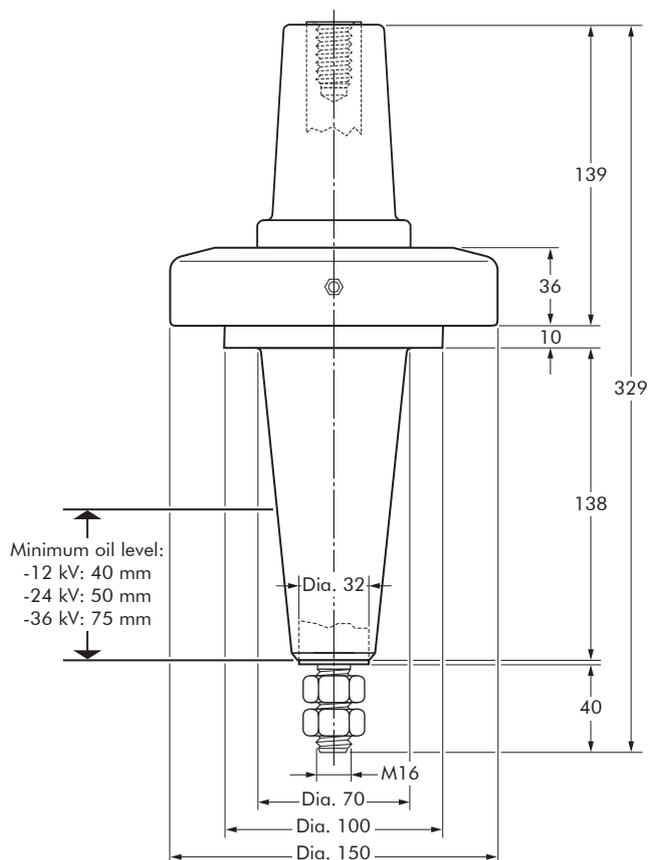


In mm.

Equipment bushing type	Voltage U_r (kV)	Current I_r (A)
400AR-4	12	1250
K400AR-4	24	1250
M400AR-4	36	1250


08/2011

FIXINGS FOR EQUIPMENT BUSHINGS

400AR-4/GS Bushing

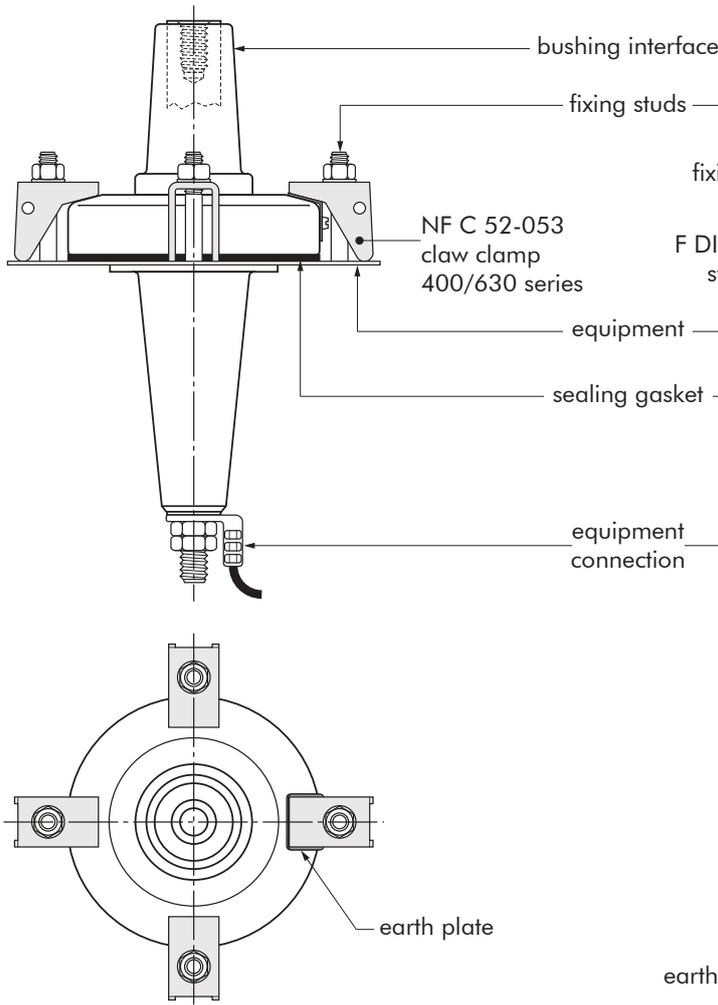

400AR-4/J Bushing

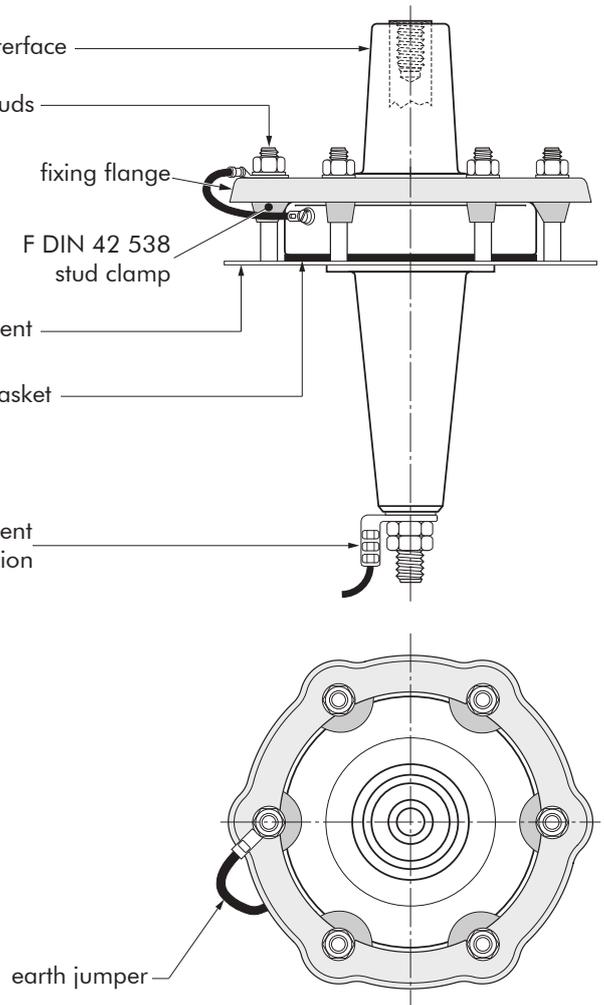

Bushing clamping kit

To order the bushing clamping kit, according to NFC 52-053 standards, simply specify KBCNF-400.

- Contents: - 4 x claw clamp NF400
- 1 x sealing gasket.


Bushing clamping kit

To order the bushing clamping kit with DIN style fixing flange, simply specify KBCDS-400.


- Contents: - 1 x fixing flange DIN style
- 6 x stud clamp F DIN 42 538
- 1 x sealing gasket.

Fixing dimensions standards NF C 52-053

French standards.

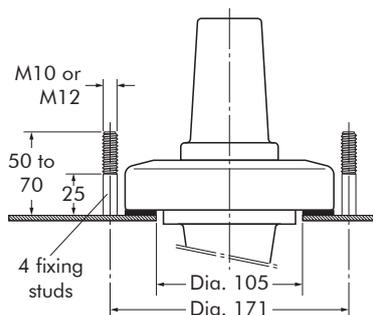

Fixing dimensions

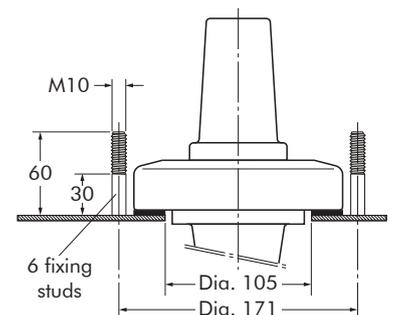

In mm.