

**PRODUCT: Detectamesh®**

<b>DESCRIPTION:</b>	
Polypropylene mesh laminated with a 50mm wide printed polyethylene warning band top tape and incorporating a stainless steel tracer wire. Wire conforms to BS1554. Mesh manufactured to EN12613.	

<b>PHYSICAL CHARACTERISTICS:</b>	
BASE COLOUR	See page 2
PRINT COLOUR	Black
TEXT	See page 2

<b>DIMENSIONAL CHARACTERISTICS:</b>	
ROLL WIDTH	200mm
ROLL LENGTH	100m
ROLL DIAMETER	250mm
MESH WEIGHT	70g/mm2
APERTURE SIZE	95 x 20mm
WIRE DIAMETER	0.4mm

<b>MESH TECHNICAL CHARACTERISTICS:</b>	
Measurements	Results
TENSILE STRENGTH	>3.5N/mm2
ELONGATION @ YIELD	>15%
ELONGATION @ BREAK	>35%

For and on behalf of Boddingtons Limited

*Reli Good*

Quality Manager

All the above information is given in good faith, but the figures are typical values only and should not be taken as a guarantee of performance. Manufacturing tolerances for dimensional and technical characteristics apply and are available on request. The company reserves the right to improve the product and adjust the specification without notice.

SPEC: 016747  
 Issue: 2  
 Page 1 of 2  
 Date: May 2008

**BODDINGTONS LIMITED**






Blackwater Trading Estate • The Causeway • Maldon • Essex CM9 4GG • England  
 Tel: +44 (0) 1621 874200 Fax: +44 (0) 1621 874299  
 e.mail: sales@boddingtons-ltd.com • www.boddingtons-ltd.com



Certificate No. FM 33039

**PRODUCT: Detectamesh®**

**STANDARD TEXTS AVAILABLE FROM STOCK**

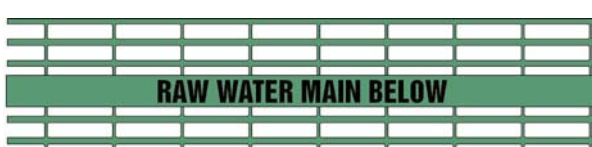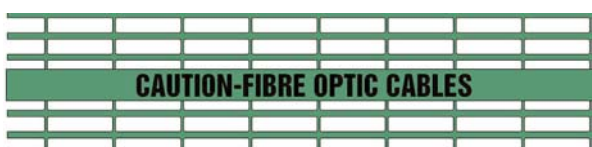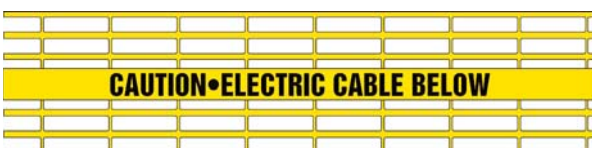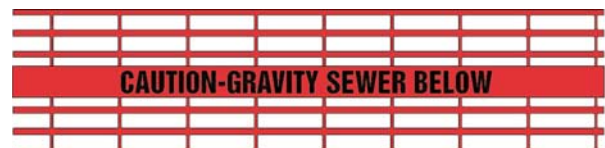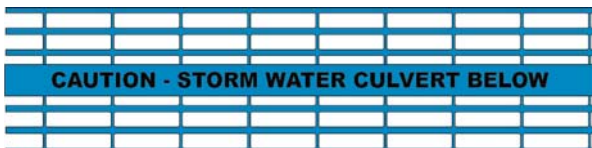

Other colours, texts and designs are available upon request subject to minimum order quantities and site of artwork.

The above texts are for illustration purposes and are not to scale. The colours, text design and mesh structure may vary from the above.