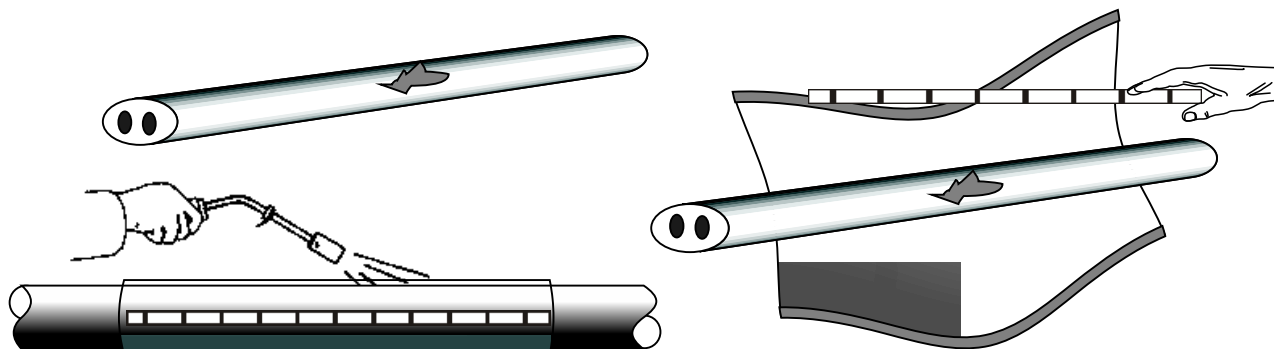


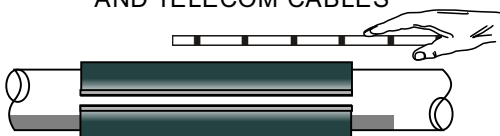


# Shrink Polymer Systems


Cable Installation Materials – 24 volts to 36 kV

## HEATSHRINK WRAPAROUND CABLE SHEATH REPAIR SUITABLE FOR POWER, SIGNALLING AND TELECOM CABLES




PART NUMBER	P.A.D.S CAT. NO	RECOMMENDED WORKING RANGE	JOINT STYLE
SWRS 50-15-1000	54/18640	13mm TO 40mm	ALL TYPES OF POWER, SIGNALLING AND TELECOM CABLES 
SWRS 75-22-1000	54/18606	20mm TO 60mm	
SWRS 105-30-1000	54/18608	28mm TO 90mm	
SWRS 146-38-1000	54/18609	35mm TO 130mm	
SWRS 188-55-1000	54/18607	50mm TO 175mm	

## MOISTURE BARRIER KITS

PART NUMBER	P.A.D.S CAT. NO	JOINT DESCRIPTION TO SUIT CABLE DIA	JOINT STYLE
SPS 077	54/13658	CABLE GLAND SUPPORT AND SEALING COLLAR (10 PER KIT)	ALL TYPES OF POWER AND SIGNALLING CABLE 
SPS 980	54/37094	TPWS CABLE (24 PER KIT)	
SPS 720	54/37070	6mm TO 14mm (24 PER KIT)	
SPS 096	54/37052	13mm TO 24mm (24 PER KIT)	
SPS 097	54/37053	20mm TO 37mm (24 PER KIT)	
SPS 098	54/37054	27mm TO 48mm (24 PER KIT)	

## CABLE END SEALING CAPS

PART NUMBER	P.A.D.S CAT. NO	RECOMMENDED WORKING RANGE	JOINT STYLE
C12-4	54/10716	4mm TO 10mm	CABLE SEALING CAP 
C20-8	54/12054	9mm TO 18mm	
C40-15	54/12051	15mm TO 35mm	
C63-25	54/12052	25mm TO 60mm	
C76-30	54/12053	30mm TO 72mm	