


Cable Testing Socket Size 3

to be used during carrying out start-up tests on cables with MV-CONNEX separable connectors.

Caution:

The cable test socket is not touchproof. After testing, the test socket must be earthed and short-circuited. The cable test socket is not suitable for partial discharge measuring.

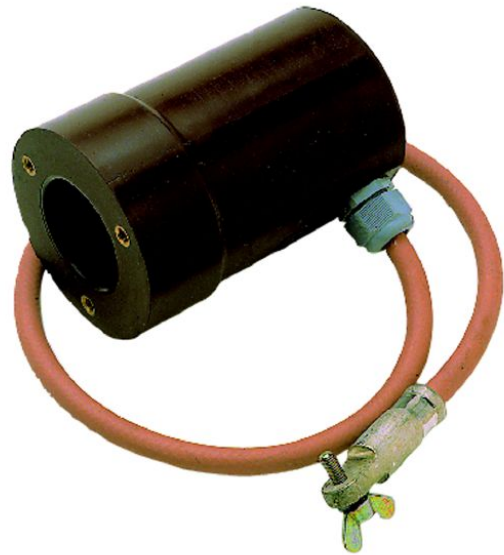

Picture may vary.

Technical Data

Article no.	827 125 003	
Size	3	
Rated DC Withstand Voltage	15 min. (kV)	65
Rated power frequency withstand voltage	1 min (kV)	72
Rated power frequency withstand voltage (1 hr.)	1h (kV)	65
DC voltage test	15 min 6 x U ₀ (kV)	72



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com