


CONNEX Earthing and Current Testing Connector, Size 2

This connector permits to carry out current tests on switchgears, transformers, transducers etc. fitted with CONNEX bushings.

For the electrical and mechanical connection, the connector is inserted into a CONNEX bushing of equal size and bolted. The test lead is connected to the terminal stud with a screw.

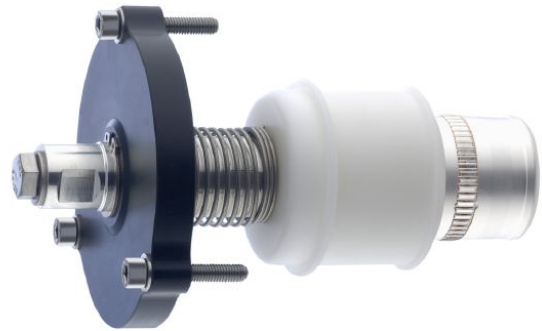

Picture may vary.


Technical Data

Article no.	827 181 012	
Size	2	
Max. testing voltage	U_m (kV)	2
Nominal current	I_N (A)	800
Rated short-time withstand current	1 s (kA)	40
Rated short-time withstand current	3 s (kA)	25
Test current	max. 4min./A	2500



Dimensions

Dimension A	a (mm)	102
Dimension B	b (mm)	30
Dimension C	c (mm)	122
Dimension D	d (mm)	184

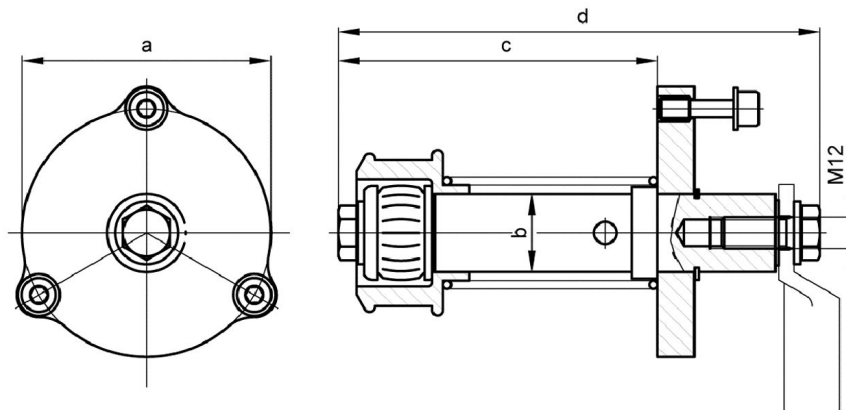

THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com