


APPLICATION

Heat-shrinkable terminations for three core PILC/PICAS cables, used by power utilities and in industrial applications.
For use indoor in controlled environmental conditions.

DESIGN

1. Cable lug (supplied on request).
2. Water sealing mastic.
3. Anti-tracking heat-shrinkable tube.
4. Anti-tracking sheds (when required).
5. Stress control heat-shrinkable tube.
6. Stress control mastic.
7. Break-out.
8. Barrier tube.

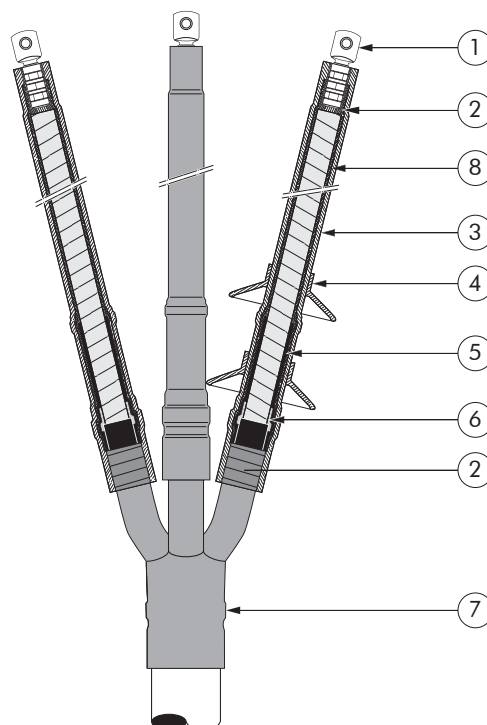

**6/10 (12) kV
6.35/11 (12) kV**

Up to 12 kV

SPECIFICATIONS AND STANDARDS

Meets the requirements of CENELEC HD 629.1 and IEC 60502-4.

ORDERING INSTRUCTIONS

Select the part number and add both system voltage and conductor size range.

Example part number:

SPDI 12/95-150

Termination type	Voltage class (Um)	Cable cross section (mm ²)
SPDI 12/16-25	12 kV	16-25
SPDI 12/35-70		35-70
SPDI 12/95-150		95-150
SPDI 12/185-500		185-500



For use with other sizes and cable types.
Please contact our representative.

11/2017