

SICON connector 10-95 mm² with blind hole

The special design of SICON bolts means that there are no fixed predetermined break points in the thread. Instead the bolt always breaks reliably at the surface of the clamp body.

- Nothing protrudes from the clamp body
- Full use of the thread load rating for any conductor cross section
- No special tools needed
- Smooth breakage of the shear bolt simplifies tightening




Picture may vary.

Technical Data

Article no.	332 601 010	
Conductor cross section Al solid circular	(mm ²)	10 - 95
Conductor cross section Al stranded circular	(mm ²)	10 - 95
Conductor cross section Al stranded circular compressed	(mm ²)	10 - 95
Conductor cross section Al solid sector-shaped	(mm ²)	50 - 95
Conductor cross section Al stranded sector-shaped	(mm ²)	35 - 70
Conductor cross section Cu solid circular	(mm ²)	10 - 95
Conductor cross section Cu stranded circular	(mm ²)	10 - 95
Conductor cross section Cu stranded circular compressed	(mm ²)	10 - 95
Conductor cross section Cu stranded sector-shaped	(mm ²)	35 - 70
Stripping length with centring sleeve	(mm)	40
Stripping length without centring sleeve	(mm)	35
Number of screws		2
Width across flats		SW 5

Dimensions

Diameter D1	Ø d1 (mm)	24
Diameter D2	Ø d2 (mm)	13
Dimension L1	L ₁ (mm)	65
Dimension L2	L ₂ (mm)	75

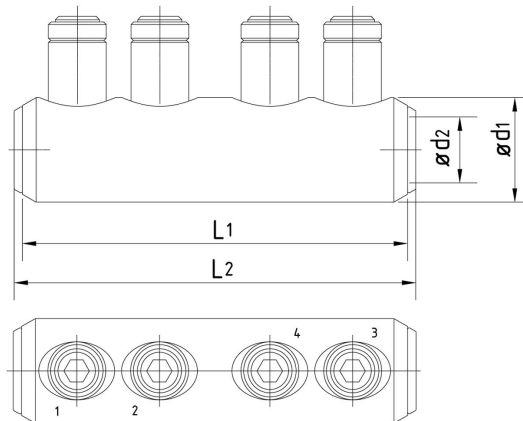

THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com