


# FiloShrink Cold Tubes



The range of Filoshrink Cold Tubes has been designed to suit a multitude of applications, offering exceptional mechanical, environmental and sealing properties. Constructed from high quality EPDM, the Filoshrink Tubes are available in many diameters and lengths, and are suitable for both internal or external applications. The Filoshrink Tube remains flexible, making them ideal for cable tray applications where room is limited, or there is likely to be movement of the cable soon after jointing.

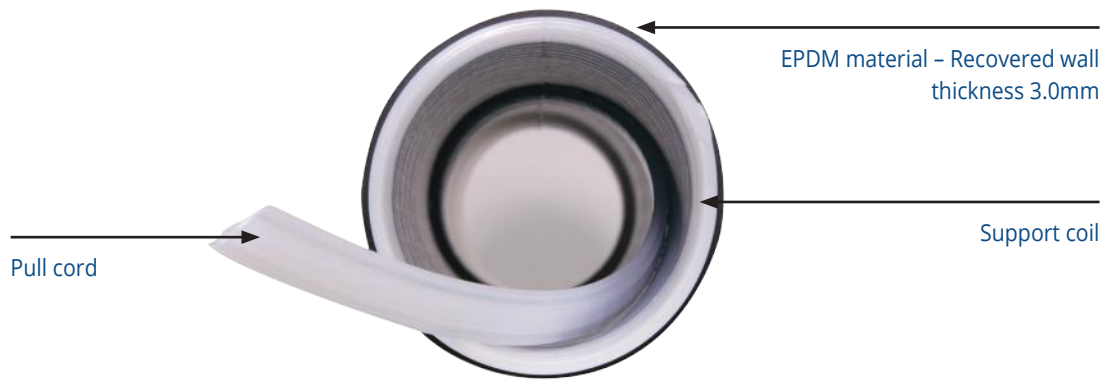

Product Name	Relaxed tube length	Diameter Ø	Range of cable outer diameter - mm
Filoshrink CT - FS25-8	203mm	25mm	10.0 > 20.0mm
Filoshrink CT - FS35-9	230mm	35mm	14.0 > 30.0mm
Filoshrink CT - FS40-18	457mm	40mm	17.5 > 33.0mm
Filoshrink CT - FS40-10	254mm	40mm	17.5 > 33.0mm
Filoshrink CT - FS40-12	305mm	40mm	17.5 > 33.0mm
Filoshrink CT - FS53-6	152mm	53mm	25.0 > 46.0mm
Filoshrink CT - FS53-12	305mm	53mm	25.0 > 46.0mm
Filoshrink CT - FS53-14	355mm	53mm	25.0 > 46.0mm
Filoshrink CT - FS70-6	152mm	70mm	32.0 > 63.0mm
Filoshrink CT - FS104-9	229mm	104mm	43.0 > 94.0mm
Filoshrink CT - FS104-20	508mm	104mm	43.0 > 94.0mm
Filoshrink CT - FS150-18	457mm	150mm	55.0 > 135.0mm
Filoshrink CT - FS150-24	609mm	150mm	55.0 > 135.0mm

## Features

- High Quality EPDM
- Suitable for application in Hazardous Areas – onshore/offshore
- No Heat source required
- Can be used as primary insulation up to 1kv
- Remains flexible once applied
- Ideal as temporary or permanent seal on Fibre Optic Ducting
- Suitable for Cable Tray or Direct Buried applications



**THORNE & DERRICK**  
INTERNATIONAL

**Thorne & Derrick**  
+44 (0) 191 410 4292  
[www.powerandcables.com](http://www.powerandcables.com)