

Slidewire (resistive) Load Tap Changer Position Indicator

Model 1511-LTC




Applications

The INCON Model 1511-LTC is ideal for On-Load Tap Changers that require accurate position measurement.

- Indicates tap position on transformers utilizing slidewire (resistive) transmitters.
- Provides visual and electrical indication of position.
- Input signals are filtered through a software algorithm, which keeps the display stable in noisy environments, but allows instant updates when tap position changes.
- Performs absolute local and remote position feedback.
- Simplified programming for uni-polar (0-32 taps) or bi-polar (-16 to +16 taps) applications.

Slide Wire

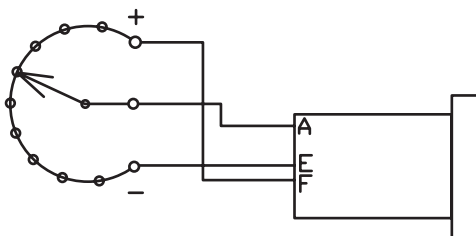

1511-LTC



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

The INCON Model 1511-LTC programmable position monitor is a sophisticated microprocessor-based panel instrument.

Capabilities

The INCON Model 1511-LTC performs a number of functions to help improve system operation.

- Provides flexible, real-time, analog and digital outputs to interface with SCADA, PLCs and computers.
- Analog output is unaffected by noisy or intermittent input signals.
- Provides regulated 24 VDC slidewire power.
- Accepts a 0-24 VDC signal from a slidewire (resistive) transmitter.
- Provides programmable segmented position indication.
- Offers programmable relay outputs for alarm and control (optional).
- Raise (R) and Lower (L) indication.
- Remote display driver.

Features

- Extremely accurate signal conditioner.
- Analog and digital output.
- Program via computer using ASCII.
- Modbus protocol option.
- Draghand function to recall lowest and highest tap movements.
- Large five-digit LED display.
- Hard-wired security/lockout.
- Non-volatile storage of program parameters.
- Easy, menu-driven, set up through the front panel.

Slidewire (resistive) Load Tap Changer Position Indicator

Model 1511-LTC

Specifications

GENERAL

Input	0-24 volts direct current
Resolution	±0.001% of full scale
Accuracy	±0.02% of full scale maximum (0.01% typical)
Temperature Drift	±0.01% per °C
Operating Temp.	0° to 55°C (standard)
Humidity	10% - 90% non condensing
Weight	24 oz.
Dielectric Test	1000 VDC for 1 minute, line to any other terminal
Voltage	117/234 ±10% VAC
Frequency	47-63 Hz
Load	8 Watts maximum
Transmitter Power	Internal 24VDC supply

DISPLAY

Type	5-digit LED
Digit Height	0.56 inch (14.2mm)
Viewing distance	23 feet

ANALOG OUTPUT

Outputs	±1mA, 0-1mA, 0-2mA, or 4-20mA
Compliance	10 Volts (0-1mA, ±1mA, 0-2mA) 500 Ohms (4-20mA)
Non-Linearity	± 0.1% of full scale
Resolution	12 bits (±0.025% of full scale)


OPTIONAL HI/LO RELAYS

Contact Rating	3A@125/250 VAC (resistive), 30 VDC
----------------	------------------------------------

Optional Accessories

Model 1945	15VDC Loop Power Supply
Model 1283	Surge Protection Module
Model RD-4	Remote Display

Model 1511-LTC Dimensions

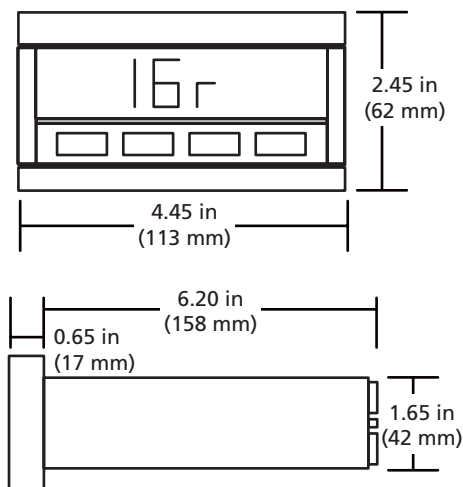

Panel cut out: 1.653 (42 mm) × 3.543 (90 mm)
Panel thickness: 0.1 (2.7 mm) to 0.19 (5.0 mm)

Ordering Information

1511-LTC-U-W-Y-ZZZ = options, see below

OPTIONS

U = Analog Output **0** (0-1mA) **2** (0-2mA)
 1 (±1mA) **4** (4-20mA)*

W = Control **R** - Hi/Low Relay Limits

Y = Communications **PB** - Parallel Data
 S - RS-232
 M - RS-485

ZZZ = Line Voltage **120** (120 VAC) or **240** (240 VAC)

*Requires 1945 or Loop Power



**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

INCON®
INTELLIGENT CONTROLS

Intelligent Controls, Inc.
92 Industrial Park Road
Saco, Maine 04072
Tel: 207-283-0156 or 800-872-3455
Fax: 207-283-0158
www.incon.com

