


AI-000509-X

(2/0 Protective Grounding Assembly w/ 2.4" Aluminum "C" Type Clamps)



- Manufactured to ASTM F855-17
- Includes:
 - 2 ea. BU-138 Smooth Aluminum "C" Clamp 2.4"
 - 2 ea. BU-138-F 2/0 Ferrules
 - 2 pairs of the BU-137 Insulators
 - 2/0 Yellow Grounding Cable (AW80092)
 - The "X" is the part number represents length in feet. Standard lengths are 6', 8', 10', and 15'.
 - Other lengths available upon request.
- Specs:
 - ASTM Grade 3
 - Withstand Rating
 - 27kA @ 15 Cycles
 - 20kA @ 30 Cycles

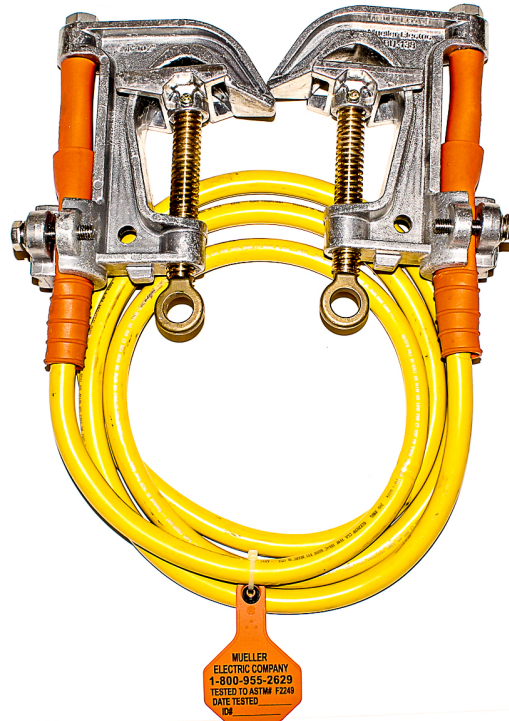

THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com