

# STAKKAbox™ ULTIMA Connect

## Access Chamber Section

1200mm x 1100mm




### Product Description

STAKKAbox™ ULTIMA Connect offers a modular scalable solution built on-site with easily connectable corner pieces and sidewall lengths. Being used in conjunction, additional chamber sizes specified by the contractor can be made.

### Product Details

Clear Opening:	1200mm x 1100mm	Weight:	28 kg	Corners:	2 x 1200mm
External Dimensions:	1335mm x 1235mm	Product Code:	CPUCRS-12001100		2 x 600mm
Stacking Depth:	150mm	Delivery Options:	Assembled Ring or	Sidewalls:	2 x 500mm
Actual Depth:	160mm		Flatpack	Pegs:	6

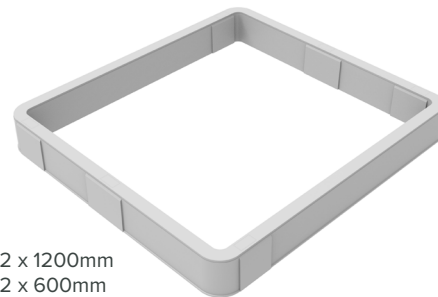

### Materials Properties

Material Profile	Glass Reinforced Polyester (GRP)	Grey
Tensile Strength	ISO 527-4	62 MPa
Flexural Strength	ISO 14125	142 MPa
Flexural Modulus	ISO 14125	9.6 GPa
Impact Strength	ISO 179	50 kJ/m <sup>2</sup>
Heat Distortion Temperature Range	ISO 75-2	>200 °C
Density	ISO 1183	1.7 g/cm <sup>3</sup>
Water Absorption	ISO 62	≤0.5%
Volume Resistivity	IEC 60093	1.00E12 ohm.cm
Fire Performance	UL 94	HB to V0
Limited Oxygen Index	ISO 4589-2	27%

### Installation


STAKKAbox™ ULTIMA Connect has been tested to withstand vertical loads of EN124 F900 when installed in accordance with the Cubis Systems STAKKAbox™ Installation Guide.

### Key Features


- Variable in size
- Lightweight
- Fast and easy to install



Scan for access to  
technical documents library



ULTIMA Connect cross-section detail

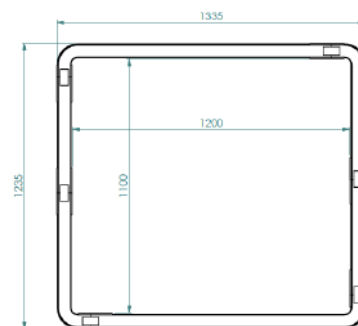

ULTIMA Connect cross-section top view

CPUC-12001100 V.01 04/05/2020

DISCLAIMER: STAKKAbox™ ULTIMA Connect is a configurable product, thus separate chambers can be constructed using different combinations of component parts. Specific component combinations can be accommodated upon request.