

Section

MV Multifunction

Application

Field

Laboratory

**PRODUCT BENEFITS**

Tuning of the pitch of the tool
 Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter 16 - 40 mm
 0,630 - 1,575 inch

Peelable semicon thickness capacity Option

Insulation thickness capacity 7 mm

Stylus included None

TOOL DIMENSIONS

Length 305 mm

Width 100 mm

Height 165 mm

Weight without box 1,38 Kg

Packaging Box

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
 FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr

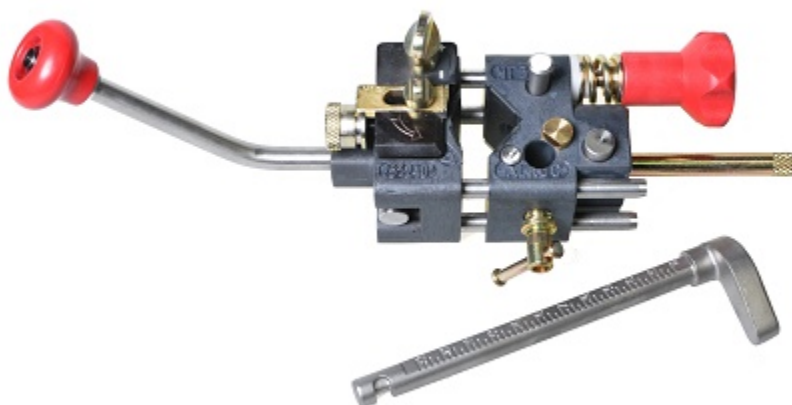
Multifunction tool for outer sheath and insulation

TO DO WHAT

The MF3/40-SSR tools enables the user to :

Remove the outer sheath (PE-PVC-PR) with a straight and neat cut

Set the length to be removed and remove the insulation with a straight and neat cut

**Options**

SR - Scoring stylus for peelable semiconductor

SRC - Scoring stylus for peelable semiconductor with chamfer

SCH - Chamfering stylus for insulation

Spare part

KIT-MF3/40 - Protective wear pads

LMF2 - Spare blade for primary insulation

BR - Thrust to set the length of insulation to be remove

VBB1 - Screw for locking the thrust

PCR - Quick set up right angled 45° handle

196855 - Straight handle M10

108098 - Clamping knob for blade

Associated tool

ALROC-FENTE - Tool to perform slits on cable's outer sheath

ROTO-TMG - Connector holder for bolted and clamping connections

DSP - Peelable semiconductor lifter



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semicon thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box