

CABLE & DUCT PULLING ACCESSORIES

SWIVEL LINK

Enables Winch rope to revolve during pulling operation preventing twisting or kinking.

Machined from solid steel zinc plated finish.

Heavy duty swivel bearing to allow sustained pulls.

Totally smooth exterior finish.

Grease packed on assembly minimising further lubrication.



| Model | Min Break Strain | Jaw Size | Pin Dia. | Overall Length | Overall Diameter | Weight |
|-------|------------------|----------|----------|----------------|------------------|--------|
| SL3 | 3 Tonne | 16mm | 10mm | 100mm | 30mm | 0.5Kg |
| SL5 | 5 Tonne | 32mm | 16mm | 200mm | 55mm | 2.5Kg |
| SL10 | 10 Tonne | 39mm | 24mm | 325mm | 60mm | 5Kg |

CABLE STOCKINGS

Sometimes called Cable Socks or Cable Grips.

An efficient method of supporting or pulling cables.

Manufactured from high tensile galvanised steel wire.

Also available on request in stainless steel wire or Kevlar.

Available as Single Eye (S type).


Double Eye (D type) or Lace Up (L type).



| Dia of Cable | S Type Code | D type Code | L type Code | Lattice Weave | Lattice Length | Overall Length | Actual Break Tonne |
|--------------|-------------|-------------|-------------|---------------|----------------|----------------|--------------------|
| 6-13mm | CS11 | CS21 | CS31 | Single | 230mm | 305mm | 0.75T |
| 13-19mm | CS12 | CS22 | CS32 | Single | 355mm | 430mm | 1.00T |
| 19-25mm | CS13 | CS23 | CS33 | Single | 405mm | 510mm | 2.50T |
| 25-38mm | CS14 | CS24 | CS34 | Single | 455mm | 610mm | 3.50T |
| 38-50mm | CS15 | CS25 | CS35 | Double | 535mm | 735mm | 5.00T |
| 50-63mm | CS16 | CS26 | CS36 | Double | 610mm | 865mm | 5.00T |
| 63-89mm | CS17 | CS27 | CS37 | Double | 685mm | 990mm | 6.00T |
| 89-115mm | CS18 | CS28 | CS38 | Double | 685mm | 990mm | 7.00T |
| 115-130mm | CS19 | CS29 | CS39 | Double | 685mm | 990mm | 7.00T |

The following cable socks are supplied with 3 legs for pulling 3 separate cables at the same time.

| Dia of Cable | S Type Code | D type Code | Lattice Weave | Lattice Length | Overall Length | Actual Break Tonne |
|--------------|-------------|-------------|---------------|----------------|----------------|--------------------|
| 19-25mm | CST13 | CST23 | Single | 405mm | 510mm | 2.50T |
| 25-38mm | CST14 | CST24 | Single | 455mm | 610mm | 3.50T |
| 38-50mm | CST15 | CST25 | Double | 535mm | 735mm | 5.00T |
| 50-63mm | CST16 | CST26 | Double | 610mm | 865mm | 5.00T |
| 63-89mm | CST17 | CST27 | Double | 685mm | 990mm | 6.00T |
| 89-115mm | CST18 | CST28 | Double | 685mm | 990mm | 7.00T |
| 115-130mm | CST19 | CST29 | Double | 685mm | 990mm | 7.00T |

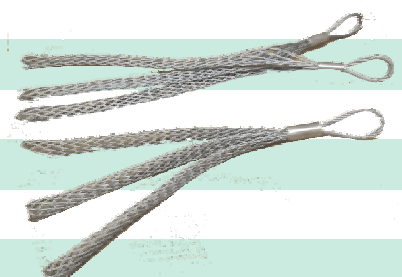

All sizes in mm. Larger diameter and longer lengths can be made to order.