
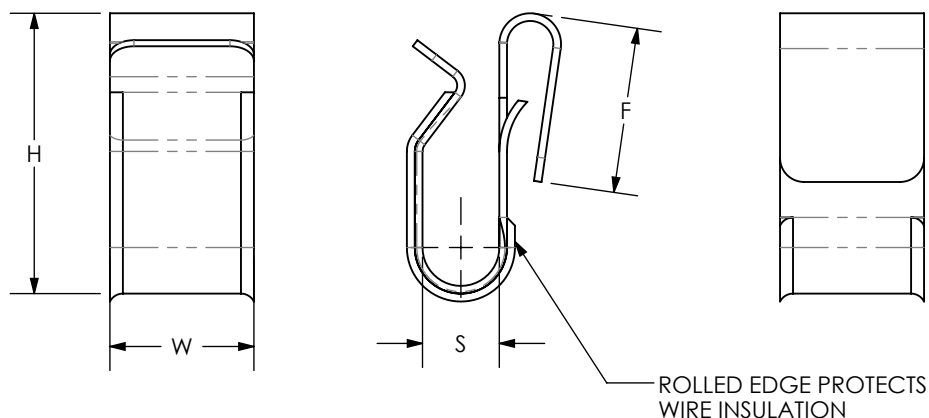


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	PANEL THICKNESS	WIRE DIAMETER	RECOMMENDED FOR USE WITH 1000V SOLAR WIRES	DIMENSIONS - IN [mm]			
				F	H	S	W
MEC100-PV-C	.051-.098" [1.3-2.5mm]	.161-.240" [4.1-6.1mm]	1 OR 2 12 GAUGE, USE-2 WIRES	.44 [11.2]	.73 [18.5]	.20 [5.1]	.38 [9.7]
MEC100-2PV-C	.051-.098" [1.3-2.5mm]	.200-.300" [5.1-7.6mm]	1 OR 2 10 GAUGE, PV WIRES	.44 [11.2]	.73 [18.5]	.28 [7.1]	.38 [9.7]



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com



NOTES:

1. UL LISTED TO US AND CANADIAN REQUIREMENTS UNDER FILE E136577
2. MATERIAL: .02" [.5] THICK 410 STAINLESS STEEL
3. CABLE ORIENTATION IS PARALLEL TO PANEL EDGE
4. NO INSTALLATION TOOLS REQUIRED
5. PACKAGING QTY: C = 100

							TITLE SOLAR METAL EDGE CLIP (MEC100-PV-C, MEC100-2PV-C) CUSTOMER DRAWING					
							ITEM REVISION NAME 00494EBK/00		PANDUIT			
							DATASET FILE NAME 00494EBK-DC/00.SLDDRW					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± .04 [1.0] ANGLES ±		MATERIAL SEE NOTES			
							THIRD ANGLE PROJECTION					
01	12/19	JHNU	TMR	RGB	REVISED UPPER LIMIT ON WIRE DIAMETER RANGE	056434	DRAWING NUMBER 00494EBK-DC					
00	11/19	JHNU	TMR	RGB	DRAWING RELEASED	056434						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JHNU	DATE 11/19	CHK TMR	SCALE N/A	SHEET 1 OF 1	SIZE A