

125 A

440 V
U_{MAXI}

HIGH TEMPERATURE PLUG DSHT



150°C



IP44



10-35 mm² (1)
10-50 mm² (2)



METAL



IK09



2 AUX.

(1) Flexible wiring (min.-max.).
(2) Stranded wiring (min.-max.).



No breaking under
load

Other configurations
on request

OTHER FEATURES

Pre-cabled auxiliaries - high-temperature cable

1.5 mm²

Earthing cable section

35 mm² max.



SOCKET-OUTLET
DSHT



INLET
DSHT

220-250 V AC	1P+N+E	3964H15	3968H15
380-440 V AC	3P+E	3964H13	3968H13
220-250 V AC 380-440 V AC	3P+N+E	3964H17	3968H17
Auxiliaries 5 A/500 V AC	+ 2 contacts	Ref. + 972	Ref. + 972

OPTIONS

Reference

LOCKING PIN FOR 2 PADLOCKS Ø 4 TO 8 mm
(PADLOCKS NOT SUPPLIED)



Réf + 843

BOXES
(WITHOUT CABLE GLAND)



Input

Reference

METAL BOX (+ EARTHING WIRE) + METAL SLEEVE



30°

M25

574C3M25185

30°

M32

574C3M32185

30°

M40

574C3M40185

30°

M50

574C3M50185

HANDLE
(WITHOUT CABLE GLAND)

Input

Reference

METAL HANDLE (+ EARTHING WIRE)



M25

574P0M25185

M32

574P0M32185

M40

574P0M40185

M50

574P0M50185

HIGH TEMPERATURE
CABLE GLAND (IP2X)

Cable outer Ø

Input

Reference



12,0 - 20,5 mm

M25

9PEM25BR

18,0 - 27,8 mm

M32

9PEM32BR

24,0 - 33,0 mm

M40

9PEM40BR


33,0 - 42,0 mm

M50

9PEM50BR

DRAWINGS AND DIMENSIONS

PLUG ON SOCKET OUTLET

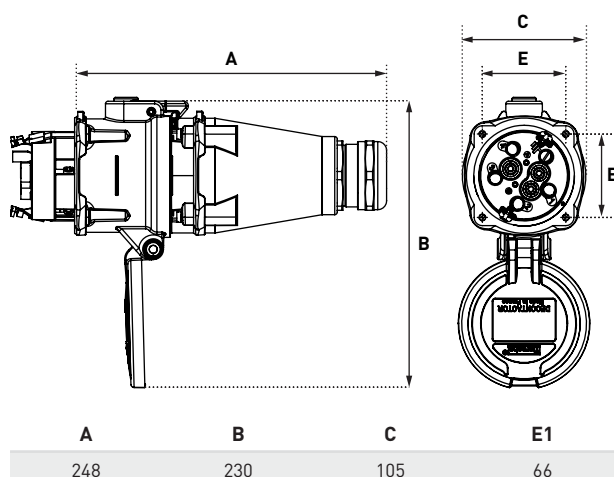

PLUG ON 30° WALL MOUNTED SOCKET OUTLET

