

DSN MULTICONTACT is a compact and reliable multipins connector for industrial purposes.

DSN MULTICONTACT complies with the essential requirements of the following regulations (a):
European Low Voltage Directive and RoHS (affixing of CE marking), European REACH Regulation,
standards IEC/EN 61984.

DSN MULTICONTACT is certified by the following certification bodies:
TR CU (Russia), Bureau Veritas Marine.



DSN12C



DSN24C



DSN37C

General information

	DSN12C	DSN24C	DSN37C
(b) I_n	16 A	16 A	16 A
(c) ΣI_n	≤ 110 A	≤ 230 A	≤ 360 A
U_{max} (V AC/V DC)	480/600	480/600	480/600
(d) Frequency (Hz)	≤ 500	≤ 500	≤ 500
(e; f) Number of contacts	12	24	37
(g) Number of keying positions	1	1	3
Connection (min - max): mm ²			
Flexible conductors (Cu): main contacts	≤ 2.5	≤ 2.5	≤ 2.5
Rigid/stranded conductors (Cu): main contacts	≤ 2.5	≤ 2.5	≤ 2.5
Tightening torque - main contacts	To crimp or to weld		
Wiring lugs	✓	✓	✓

Used as connector according to IEC/EN 61984: In

	16	16	16
U_{max}	480 V AC	480 V AC	480 V AC
	600 V DC	600 V DC	600 V DC

Number of operations


Mechanical	5 000	5 000	5 000
------------	-------	-------	-------

Thermal features

Temperature of use mini/maxi (°C)	-40/+60 °C	-40/+60 °C	-40/+60 °C
Storage temperature mini/max: (°C)	-40/+80 °C	-40/+80 °C	-40/+80 °C
Maximal temperature rise (Kmax)	38 K	55 K	37 K
Time constant (to reach 63 % of Kmax)	15 mn	15 mn	15 mn


Mechanical features

(h) IP: connected device	IP66/IP67/ IP69	IP66/IP67	IP66/IP67
(h) IP: lid/cap closed	IP66/IP67/ IP69	IP66/IP67	IP66/IP67
(h) IP: socket-outlet with lid/cap opened	IP2X	IP2X	IP2X
(i) IK	IK09	IK09	IK09
Retaining/releasing device	Red release button		
(i) Casing	GRP (poly)		
Standard color	MARECHAL® Blue		
Other colors	On request		
Vibrations resistance	✓	✓	✓
Resistance to chemical agents	Contact us		
Protection against UV (according to UL 746C or equivalent)	f1	f1	f1
Salt mist resistance	> 50 000 h	> 50 000 h	> 50 000 h
Screws and bolts	Stainless steel		
Weight of inlet without accessory (≈)	0.1 kg	0.3 kg	0.4 kg
Weight of socket-outlet without accessory (≈)	0.2 kg	0.3 kg	0.5 kg

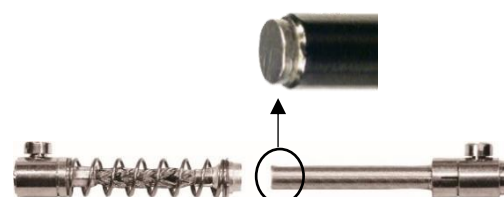

Contacts with silver nickel alloy tips (Ag/Ni : 85/15)


Crimping contacts

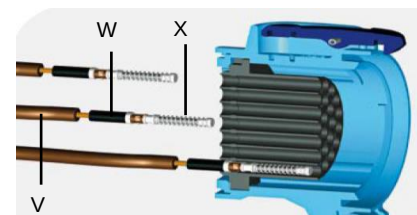

V : isolated conductor

W : isolation sleeve on ferrule

X : socket-outlet contact

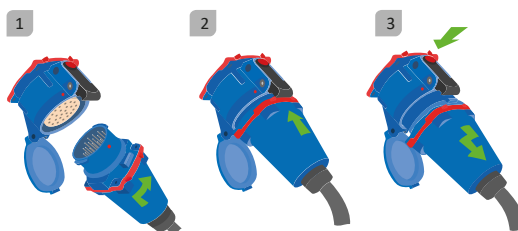

Main options

- Socket-outlet opening up to 180°
- Self-returning lid
- Inlet cap
- Locking / padlocking
- Larger release button ("STOP")
- Finger draw plates

DSN12C

- Included
IP40
IP66/IP67
- ✓
✓
✓

DSN24C

- Included
IP40
IP66/IP67
- ✓
✓
✓

DSN37C

- Included
IP40
IP66/IP67
- ✓
✓
✓



Locking pin for 2 padlocks

Mounting accessories

- Poly sleeve: angle (°)
- Metal sleeve: angle (°)
- Poly box: angle (°)
- Poly box + poly sleeve: angle (°)
- Metal box + poly sleeve: angle (°)
- Metal box + metal sleeve: angle (°)
- Poly straight handle with built-in cable gland: range take (mm)
- Threaded poly straight handle
- Threaded metal straight handle
- Poly straight handle + separated poly cable gland: range take (mm)
- Metal straight handle + separated metal cable gland: range take (mm)

- 30/70
0/30/70
30
20
70
30
0/30

- 30/70
0/30
30
20
70
30
0/30

- 30/70
0/30/70
30
20
70
30
0/30/70

M20 - M32

M20 - M40

M20 - M40

M20 - M32

M20 - M40

M20 - M40

5 - 25

5 - 32

9 - 32

7 - 23

7 - 32

7 - 32

Spare parts

- Inlet or socket-outlet interior moulding
- ^(k) Inlet or socket-outlet contacts
- Inlet or socket-outlet casing
- Gaskets

- ✓
✓
✓
✓

- ✓
✓
✓
✓

- ✓
✓
✓
✓


Catalog: [Web link](#)

[Click !](#)

[Click !](#)



[Click !](#)

Poly straight handle with built-in cable gland

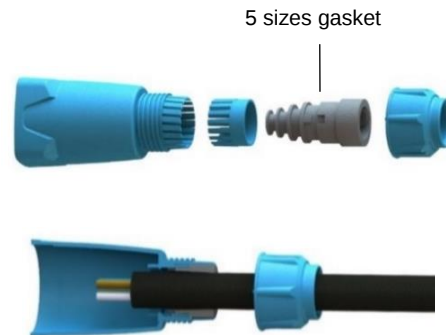

5 sizes gasket

Dimensions

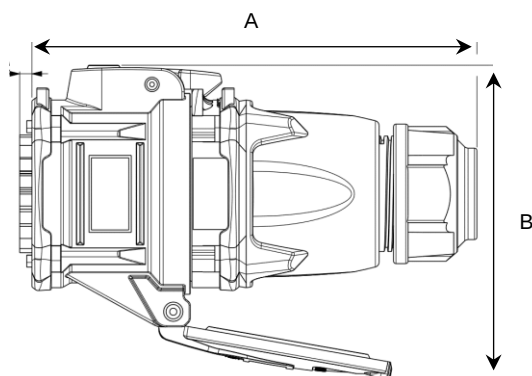

mm	DSN12C	DSN24C	DSN37C
A	147	171	184
B	134	171	195
C	58	77	84
E	42	48	55

(a) European Regulation REACH: registration, evaluation, authorisation and restriction of chemicals
IEC/EN 61984 : "Connectors – Safety requirements and tests"

(b) In : Rated current as defined by the manufacturer

(c) $\Sigma I_n (A)$: sum of current circulating in the contacts

(d) Other frequency: contact us

(e) Contacts with silver-nickel tips (Ag/Ni 85/15)

(f) The contacts can be used either for power or signal

(g) Number of voltage / frequency / grid, keying positions

(h) IP : Degrees of protection provided by enclosures (IEC/EN 60529)

(i) IK : Degrees of protection provided by enclosures against mechanical impacts (IEC/EN 62262)

(j) GRP : Glass-reinforced technical plastic

(k) Each DSN12C, DSN24C and DSN37C is supplied with respectively one, two and three bags of 13 contacts with insulation sleeve and ferrule