





## **LINK BOX TECHNICAL DATA SHEET**

Drw. No. 04.10.10 Article No. 05810001/0

 Issued Date:
 4.08.2021

 Rev. Date:


 Rev.
 00

Туре	LB. U . E .1SA . 1 . 1		
- Description	One Phase Earthing Link Box for Single Cable		
- Designation	Underground		
- Bonding	Earthing		
- Sheath Voltage Limiter	qty 1		
- Phase No.			
Earth	1		
Drawing Number	04.10.10		
- Article No	05810001/0		
Electrical Characteristics			
- Rated Frequency	50/60 Hz		
- SVL Type (*)	Up to 10 kV / Optiona		
Protection Class	IP 68		
Material			
- Enclosure	Stainless Steel AISI304 (AISI316 optional		
- Body Thickness (**)	2 mm		
- Cover Thickness	3 mm		
- Connection Links	10 μm Tinned Electrolytic Copper		
- Connection Links Dimension	40x10 mm (400 mm2)		
- Gasket	Silicone		
- Cable Glands	2x48 mm		
- Cable Glands Insulation	Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tub		
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 95-400 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code	RAL 7032		
- Labeling Material	Stainless Steel		
- Protection Cover	PET-G		
AC Impulse Test			
- Phase-to-Phase	60 kV		
- Phase-to-Earth	30 kV		
Voltage Withstand Test			
- AC	20 kV/1 mir		
- DC	25 kV/5 mir		
Short Circuit Test			
- Symmetrical	NA		
Internal Power Arcing Test (Symmetrical)	40 kA/0.1 sec		
mornari over Arenig 1931 (Symmetrical)	40 KA(0.1 Sec		

<sup>\*</sup> In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


<sup>\*\*</sup> Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

## **Bonding Cable**

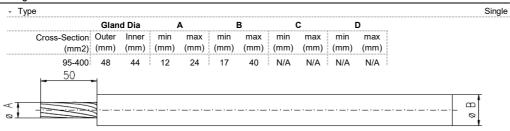



## Schematic Diagram

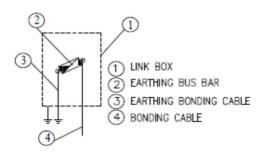

## Enclosure Dimensions (\*)

Width	400 mm		
Length	380 mm		
Heigth	289 mm		
Weigth	25 kg		
Filling Compund (Optional)			
Volume	15 lt (**)		

<sup>\*</sup> Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

 $<sup>^{\</sup>star\star}$  Given are approximate values. Actual values might sligthly differ.