





LINK BOX TECHNICAL DATA SHEET

Drw. No. 10.04.02 Article No. 12402001/0

| | Issued Date: 12.08.202 Rev. Date: | | |
|--|---|-------|--|
| | Rev. | 00 | |
| уре | LB. P. E . 3 | 1 | |
| - Description | Three Phase Earthing Link Box for Coaxial Cable | | |
| - Designation | Pedestal | | |
| - Bonding | Earthing | | |
| - Sheath Voltage Limiter | N/A | | |
| - Phase No. | | | |
| Earth | | | |
| Drawing Number | 10.0 | 04.02 | |
| - Article No | 124020 | | |
| Stanting I Characteristics | | | |
| Electrical Characteristics - Rated Frequency | 50/60 | Hz | |
| - SVL Type (*) | N/A | | |
| Protection Class | IP | 67 | |
| Material | | | |
| - Enclosure | Stainless Steel AISI304 (AISI316 optional) | | |
| - Body Thickness (**) | 3 mm | | |
| - Cover Thickness | 3 mm | | |
| - Connection Links | 10 μm Tinned Electrolytic Copper | | |
| - Connection Links Dimension | 50x10 mm (500 mm2) | | |
| - Gasket | Silicone | | |
| - Cable Glands | 3x89 mm & 1x48 mm | | |
| - Cable Glands Insulation | Silicone gasket & EPR tape | | |
| - Insulation | Epoxy Support Insulato | | |
| - Conductor Fixing | Coaxial Flexconn - 400-500 mm2 | | |
| - Painting Process | Electro Static Polyester Powder Pain | | |
| - Painting Code | RAL 7032 | | |
| - Labeling Material | Stainless Stee | | |
| - Protection Cover | P | ET-G | |
| AC Impulse Test | | | |
| - Phase-to-Phase | N/A | k۷ | |
| - Phase-to-Earth | 62,5 | k۷ | |
| /oltage Withstand Test | | | |
| - AC | 20 kV/ | 1 min | |
| - DC | 25 kV/s | 5 min | |
| Short Circuit Test | | | |
| more directive rest | | 1sec | |


^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.

Internal Power Arcing Test (Symmetrical)


kA/0.1 sec

^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

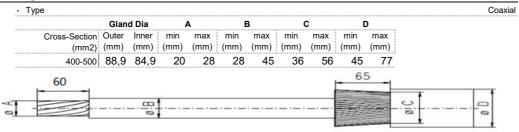

Schematic Diagram

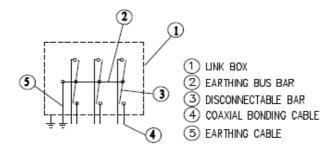

Enclosure Dimensions (*)

| Width | 940 mm | |
|-----------------|------------|--|
| Length | 1203 mm | |
| Heigth | 470 mm | |
| | | |
| Weigth | 180 kg | |
| Filling Compund | (Optional) | |
| Volume | N/A | |

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.