





## **LINK BOX TECHNICAL DATA SHEET**

Drw. No. 10.04.05 Article No. 12405001/0

 Issued Date:
 10.05.2019

 Rev. Date:
 4.08.2021


 Rev.
 03

Туре	LB. W. E	. 3.1	
- Description	Three Phase Earthing Link Box for Single Cable		
- Designation	Wall Type		
- Bonding	Earthing		
- Sheath Voltage Limiter	N/A		
- Phase No.		3	
Earth		1	
Drawing Number		10.04.05	
- Article No		12405001/0	
Electrical Characteristics			
- Rated Frequency	50/60	Hz	
- SVL Type (*)		N/A	
Protection Class		IP 68	
Material			
- Enclosure	Stainless Steel AISI304 (AISI316 optional)		
- Body Thickness (**)	3 mm		
- Cover Thickness	3 mm		
- Connection Links	10 µm Tinned Electrolytic Copper		
- Connection Links Dimension	40x10 m	nm (400 mm2)	
- Gasket		Silicone	
- Cable Glands		4x48 mm	
- Cable Glands Insulation	Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tube		
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 95-400 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code		RAL 7032	
- Labeling Material	5	Stainless Steel	
- Protection Cover		PET-G	
AC Impulse Test			
- Phase-to-Phase	N/A	kV	
- Phase-to-Earth	40	kV	
Voltage Withstand Test			
- AC	20	kV/1 min	
- DC	25	kV/5 min	
Short Circuit Test			
- Symmetrical	50	kA/1sec	
Internal Power Arcing Test (Symmetrical)	40	kA/0.1 sec	

<sup>\*</sup> In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


<sup>\*\*</sup> Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

## Bonding Cable

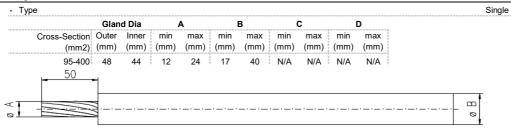

V

Schematic Diagram

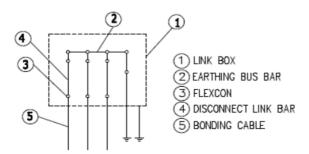

## Enclosure Dimensions (\*)

Width	630 mm	
Length	500 mm	
Heigth	250 mm	
Weigth	50 kg	
Filling Compund	(Optional)	
Volume	N/A	

<sup>\*</sup> Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

 $<sup>^{\</sup>star\star}$  Given are approximate values. Actual values might sligthly differ.