





LINK BOX TECHNICAL DATA SHEET

Drw. No. 10.04.06 Article No. 12406001/0

 Issued Date:
 10.05.2019

 Rev. Date:
 4.08.2021


 Rev.
 03

Туре	LB. W . E .3SA . 3 . 1		
- Description	Three Phase Earthing Link Box for Single Cable		
- Designation	Wall Type		
- Bonding	Earthing		
- Sheath Voltage Limiter	qty 3		
- Phase No.	3		
	1 40 04 00		
Prawing Number - Article No	10.04.06 12406001/0		
Electrical Characteristics			
- Rated Frequency	50/60 Hz		
- SVL Type (*)	Up to 10 kV / Optional		
- 3vL Type ()	ор и току / Ориона		
Protection Class	IP 68		
Material			
- Enclosure	Stainless Steel AlSI304 (AlSI316 optional)		
- Body Thickness (**)	3 mm		
- Cover Thickness	3 mm		
- Connection Links	10 μm Tinned Electrolytic Copper		
- Connection Links Dimension	40x10 mm (400 mm2) Silicone 4x48 mm Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tube		
- Gasket			
- Cable Glands			
- Cable Glands Insulation			
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 95-400 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code	RAL 7032		
- Labeling Material	Stainless Steel		
- Protection Cover	PET-G		
AC Impulse Test			
- Phase-to-Phase	75 kV		
- Phase-to-Earth	40 kV		
/oltage Withstand Test			
- AC	20 kV/1 min		
- DC	25 kV/5 min		
Short Circuit Test			
- Symmetrical	N/A		
nternal Power Arcing Test (Symmetrical)	40 kA/0.1 sec		

^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

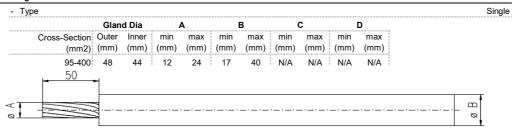

Ø.

Schematic Diagram



Enclosure Dimensions (*)

Width	630 mm	
Length	500 mm	
Heigth	250 mm	
Weigth	50 kg	
Filling Compund	(Optional)	
Volume	N/A	

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.