





LINK BOX TECHNICAL DATA SHEET

Drw. No. 10.04.07 Article No. 12407001/0


158.2021 Rev. Date: 4.08.2021 Rev. 00

Туре	LB. W . E .4SA . 4 . 1		
- Description	Four Phase Earthing Link Box for Single Cable		
- Designation	Wall Type		
- Bonding	Earthing		
- Sheath Voltage Limiter	qty 4		
- Phase No.	4		
Earth	1 10.04.07 12407001/0		
Drawing Number			
- Article No			
Electrical Characteristics			
- Rated Frequency	50/60 Hz		
- SVL Type (*)	Up to 10 kV / Optional		
Protection Class	IP 68		
Material			
- Enclosure	Stainless Steel AISI304 (AISI316 optional)		
- Body Thickness (**)	3 mm		
- Cover Thickness	3 mm		
- Connection Links	10 μm Tinned Electrolytic Copper		
- Connection Links Dimension	40x10 mm (400 mm2)		
- Gasket	Silicone		
- Cable Glands	5x48 mm		
- Cable Glands Insulation	Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tube		
- Insulation	Epoxy Support Insulator		
- Conductor Fixing	Conductor Flexconn - 95-400 mm2		
- Painting Process	Electro Static Polyester Powder Paint		
- Painting Code	RAL 7032		
- Labeling Material	Stainless Steel		
- Protection Cover	PET-G		
AC Impulse Test			
- Phase-to-Phase	60 kV		
- Phase-to-Earth	40 kV		
Voltage Withstand Test			
- AC	20 kV/1 min		
- DC	25 kV/5 min		
Short Circuit Test			
- Symmetrical	50 kA/1sec		
Internal Power Arcing Test (Symmetrical)	40 kA/0.1 sec		


^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.

^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

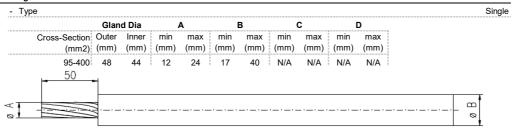

Schematic Diagram



Enclosure Dimensions (*)

Width	780 mm		
Length	500 mm		
Heigth	250 mm		
Weigth	66 kg		
Filling Compund (Optional)			
Volume	N/A		

Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation
Given are approximate values. Actual values might sligthly differ.