





LINK BOX TECHNICAL DATA SHEET

Drw. No. 10.04.08 Article No. 12408001/0

 Issued Date:
 4.08.2021

 Rev. Date:


 Rev.
 00

| Туре | LB. W. E . 4.1 | | |
|--|--|--|--|
| - Description | Four Phase Earthing Link Box for Single Cable | | |
| - Designation | Wall Type | | |
| - Bonding | Earthing | | |
| - Sheath Voltage Limiter | N/A | | |
| - Phase No. | 4 | | |
| Earth | 1 | | |
| Drawing Number | 10.04.08 | | |
| - Article No | 12408001/0 | | |
| Electrical Characteristics | | | |
| - Rated Frequency | 50/60 Hz | | |
| - SVL Type (*) | N/A | | |
| Protection Class | IP 68 | | |
| Material | | | |
| - Enclosure | Stainless Steel AlSI304 (AlSI316 optional | | |
| - Body Thickness (**) | 3 mm | | |
| - Cover Thickness | 3 mm | | |
| - Connection Links | 10 μm Tinned Electrolytic Copper | | |
| - Connection Links Dimension | 40x10 mm (400 mm2) | | |
| - Gasket | Silicone | | |
| - Cable Glands | 5x48 mm | | |
| - Cable Glands Insulation | Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tube | | |
| - Insulation | Epoxy Support Insulator | | |
| - Conductor Fixing | Conductor Flexconn - 95-400 mm2 | | |
| - Painting Process | Electro Static Polyester Powder Paint | | |
| - Painting Code | RAL 7032 | | |
| - Labeling Material | Stainless Steel | | |
| - Protection Cover | PET-G | | |
| AC Impulse Test | | | |
| - Phase-to-Phase | N/A kV | | |
| - Phase-to-Earth | 40 kV | | |
| Voltage Withstand Test | | | |
| - AC | 20 kV/1 min | | |
| - DC | 25 kV/5 min | | |
| Short Circuit Test | EQ. ItAldace | | |
| - Symmetrical | 50 kA/1sec | | |
| Internal Power Arcing Test (Symmetrical) | 40 kA/0.1 sec | | |
| memai rowei Archig Test (Symmetrical) | 40 KA/0.1 Sec | | |

^{*} In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


^{**} Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

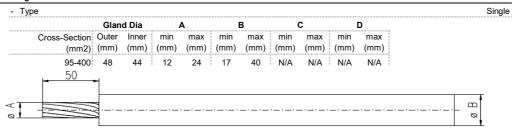

Ø.

Schematic Diagram

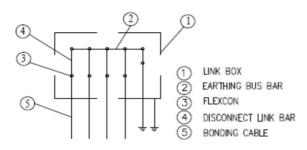

Enclosure Dimensions (*)

| Width | 780 mm | | |
|----------------------------|--------|--|--|
| Length | 500 mm | | |
| Heigth | 250 mm | | |
| Weigth | 64 kg | | |
| Filling Compund (Optional) | | | |
| Volume | N/A | | |

^{*} Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation

^{**} Given are approximate values. Actual values might sligthly differ.