



LINK BOX TECHNICAL DATA SHEET

Drw. No. **19.04.04**
Article No. **23204001/0**

Issued Date: 4.08.2021
Rev. Date: -
Rev. 00


| | | | |
|--|---|------------|--|
| Type | LB. MV . SB .6SA . 6 . 1 | | |
| - Description | Medium Voltage - Both Ends S. Point Bonding Link Box for Single Cable | | |
| - Designation | Underground | | |
| - Bonding | Single Point | | |
| - Sheath Voltage Limiter | qty | 6 | |
| - Phase No. | 6 | | |
| Earth | 1 | | |
| Drawing Number | 19.04.04 | | |
| - Article No | 23204001/0 | | |
| Electrical Characteristics | | | |
| - Rated Frequency | 50/60 | Hz | |
| - SVL Type (*) | Up to 6 kV / Optional | | |
| Protection Class | | | |
| | IP | 68 | |
| Material | | | |
| - Enclosure | Stainless Steel AISI304 (AISI316 optional) | | |
| - Body Thickness (**) | 2 mm | | |
| - Cover Thickness | 2 mm | | |
| - Connection Links | 10 µm Tinned Electrolytic Copper | | |
| - Connection Links Dimension | 30x3 (90 mm2) | | |
| - Gasket | Silicone | | |
| - Cable Glands | 7x21 mm | | |
| - Cable Glands Insulation | Silicone gasket & EPR tape & Mastic Tape & Heat Shirinkable Tube | | |
| - Insulation | Epoxy Support Insulator | | |
| - Conductor Fixing | Cable Lug - Max. 50 mm2 | | |
| - Painting Process | Electro Static Polyester Powder Paint | | |
| - Painting Code | RAL 7032 | | |
| - Labeling Material | Stainless Steel | | |
| - Protection Cover | N/A | | |
| AC Impulse Test | | | |
| - Phase-to-Phase | 35 | kV | |
| - Phase-to-Earth | 17,5 | kV | |
| Voltage Withstand Test | | | |
| - AC | 10 | kV/1 min | |
| - DC | 15 | kV/5 min | |
| Short Circuit Test | | | |
| - Symmetrical | N/A | | |
| Internal Power Arcing Test (Symmetrical) | | | |
| | 10 | kA/0.1 sec | |

* In case of mismatch in given values, technical drawing provided along with the Order Confirmation is valid. Ask for conformity if SVL is out of EMELEC's scope.


** Body Thickness might differ related to technical drawing revision. For exact value, refer to technical drawing provided along with the Order Confirmation

Bonding Cable

| - Type | | | | | | | | | | Single |
|---------------------|------------|------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Gland Dia | | A | | B | | C | | D | | |
| Cross-Section (mm2) | Outer (mm) | Inner (mm) | min (mm) | max (mm) | min (mm) | max (mm) | min (mm) | max (mm) | min (mm) | max (mm) |
| Max 50 mm2 | 21 | 17 | 11 | 8 | 15 | N/A | N/A | N/A | N/A | |



Schematic Diagram

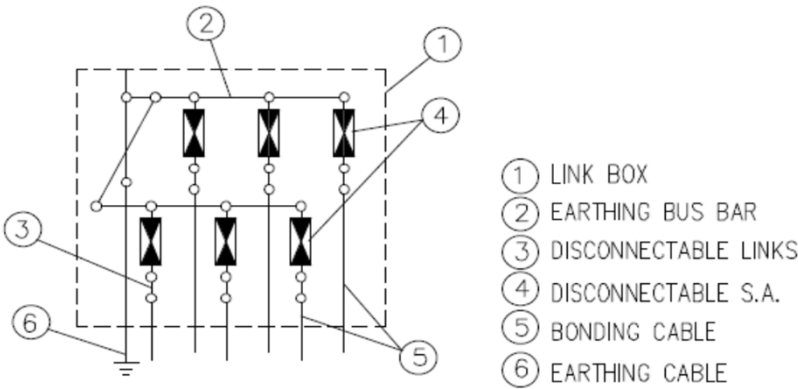

Enclosure Dimensions (*)

| | |
|--------|--------|
| Width | 450 mm |
| Length | 380 mm |
| Height | 210 mm |
| Weight | 20 kg |

Filling Compound (Optional)

| | |
|--------|-----|
| Volume | N/A |
|--------|-----|

* Scheme and dimensions are not to be mentioned as final drawing. For exact dimensions, refer to technical drawing provided along with the Order Confirmation
** Given are approximate values. Actual values might slightly differ.